



Science Arts & Métiers (SAM)

is an open access repository that collects the work of Arts et Métiers Institute of Technology researchers and makes it freely available over the web where possible.

This is an author-deposited version published in: <https://sam.ensam.eu>
Handle ID: <http://hdl.handle.net/10985/22479>

To cite this version :

Perle GEOFFROYDONDERS, Grégoire ALLAIRE, Georgios MICHAILIDIS, Olivier PANTZ - Coupled optimization of macroscopic structures and lattice infill - international Journal for Numerical Methods in Engineering, - Vol. 123 (13), p.2963-2985. - 2020

Any correspondence concerning this service should be sent to the repository

Administrator : scienceouverte@ensam.eu



Coupled optimization of macroscopic structures and lattice infill

Perle Geoffroy-Donders¹ | Grégoire Allaire²  | Georgios Michailidis³ | Olivier Pantz⁴

¹PIMM, Paris, France

²CMAP, École Polytechnique, Institut Polytechnique de Paris, Palaiseau, France

³Helic ANSYS Hellas S.A. Ioannou Apostolopoulou Athens, Greece

⁴LJAD, Université Côte d'Azur, France

Correspondence

Grégoire Allaire, CMAP, École Polytechnique, Institut Polytechnique de Paris, Palaiseau, France.
Email: gregoire.allaire@polytechnique.fr

Funding information

Agence Nationale de la Recherche, Grant/Award Number: ANR-18-CE40-0013 SHAPO; BPI, Grant/Award Number: SOFIA project; CIFRE, Grant/Award Number: SAFRAN

Summary

This article is concerned with the coupled optimization of the external boundary of a structure and its infill made of some graded lattice material. The lattice material is made of a periodic cell, macroscopically modulated and oriented. The external boundary may be coated by a layer of pure material with a fixed prescribed thickness. The infill is optimized by the homogenization method while the macroscopic shape is geometrically optimized by the Hadamard method of shape sensitivity. A first original feature of the proposed approach is that the infill material follows the displacement on the exterior boundary during the geometric optimization step. A second key feature is the dehomogenization or projection step which build a smoothly varying lattice infill from the optimal homogenized properties. Several numerical examples illustrate the effectiveness of our approach in 2-d, which is especially convenient when considering design-dependent loads.

KEYWORDS

homogenization, lattice, level set method, topology optimization

1 | INTRODUCTION

During the past decades, topology optimization has been well-established diverse industrial sectors as an efficient approach for conceptual design.¹ The capability to obtain optimized designs without spending significant time in pre-processing attracted the interest of engineers and designers that search to improve their products, especially when the mechanical framework limits the role of intuition and experience (dynamics, acoustics, electro-magnetics, fluids, etc.). The progressive incorporation of manufacturing constraints²⁻⁵ in available commercial software contributed in reducing the gap between topology optimization results and end-parts.

The recent burst of advances in additive manufacturing techniques has a significant impact on the area of topology optimization. The unprecedented design freedom endowed by such techniques provides the capability to realize designs of extreme geometric complexity. Moreover, the ability to print features at a very small scale has revitalized the interest of the homogenization method for design optimization⁶⁻¹⁰ and of various multiscale design frameworks, as in Reference 11. Infill structures are typical examples of multiscale design: the boundary of the shape is a macroscopic feature, while the interior of the shape is not homogeneous but filled by some architected material at a smaller meso-scale. The infill material can typically have any geometry: periodic or nonregular, homogeneous or graded, and so on. The interest in infill designs originates from diverse perspectives. First, it constitutes an additional design freedom,

hence enlarges the set of admissible shapes, and thus may improve the performance in terms of mass or mechanical efficiency. In addition, infill designs may be chosen for implicit reasons, as they are known to feature a better behavior than homogeneous materials for mechanical problems that are difficult to be included in the optimization problem (buckling, acoustics, etc.).^{13,14}

There already exist several works on the topology optimization of infill structures.¹⁵⁻¹⁹ However, only few works deal with the concurrent optimization of the shape and the infill part. In Reference 20, Wu et al presented a density approach with multiple filters and projection schemes in order to optimize coated structures with non-regular infill. In Reference 21, Groen et al used the same methodology for coated structures, combined with the homogenization method for the optimization of an orthotropic infill part. After the optimal design has been obtained, a dehomogenization step is applied in order to obtain a classical “black-and-white” shape. A similar approach, although using different techniques, has been presented in Reference 22.

In this work, we present another approach, based on the coupling of the level-set method^{23,24} and the homogenization method.⁹ An infill structure is described by two ingredients: its macroscopic shape and a lattice material filling the interior of the shape. Note that the shape boundary may be coated by a layer of pure material (without holes) having a fixed prescribed thickness. The structure of this lattice material is parametrized by a few variables, which may vary inside the macroscopic shape. The topology optimization process consists in alternating the homogenization method and the level-set method at each iteration, until convergence. With the first one, the parameters of the lattice material are updated, while the macroscopic shape is kept fixed. With the second one, the Hadamard method of shape sensitivity yields a velocity field which concurrently deforms the macroscopic shape and the infill material. The fact that the lattice geometry follows the shape boundary in its displacement during the optimization process is a key feature of our algorithm and is new to the best of our knowledge.

By coupling them, we take advantage of both methods. On the one hand, as was recently shown in several papers,²⁵⁻²⁷ the homogenization method is a very efficient method for optimizing a lattice structure, but with no genuine information of the external border. It is efficient because the homogenized properties of the lattice are optimized (which only requires a coarse mesh) and in a final dehomogenization step a graded lattice is projected on a possibly very fine mesh. On the other hand, the level-set method is very well suited for the optimization of macroscopic shapes, but it cannot handle lattice structures since it would require a too fine mesh to capture details at the meso-scale of the lattice (of course, except if one resorts to some kind of multi-scale approach for the numerical simulation of the lattice mechanical properties). A crucial ingredient in our coupling strategy is that the infill density must be bounded from below by a fixed positive threshold. Otherwise, there would be no optimal shape boundary since holes could be achieved by zero density infill. Numerically, the optimization process pushes the shape boundary outside of the computational domain, at the price of introducing very low density infill material in the regions which were exterior to the previous shape. Finally, after the coupled optimization of the shape boundary and of the homogenized infill properties, a post-processing step, called dehomogenization or projection, is performed to recover a modulated and oriented lattice material inside the structure. This step is based on our previous works^{27,28} (see also References 21,25) and is very economical in terms of CPU time.

Thanks to our proposed approach, infill structures can easily and effectively be optimized under new geometric constraints, without any additional steps. Indeed, contrary to density-based methods (either SIMP or homogenization), the genuine external border of the current structure is known here. We focus in the present work on three kind of problems. The first one is the coupled optimization of a macroscopic structure and its infill. Since there is no control of the thickness of the boundary of the structure in this first approach, a second case is considered, which consists in optimizing a structure, with its infill, featuring additionally a coating with given thickness. Eventually, the third problem is the optimization of an infill structure under design-dependent load, namely, hydrostatic pressure here.

Section 2 is concerned with the setting of the problem. For simplicity, we focus on compliance minimization in 2-d (our approach can be extended to other objective functions and to 3-d without major conceptual difficulties but at the price of several technicalities that are not discussed here; see Section 3.1 for some details). We recall our definition of lattice materials as periodic structures, macroscopically modulated and oriented as in Reference 27. In Section 3, the various derivatives of the objective function and constraints are computed with respect either to the shape or to the lattice parameters (size and orientation). The resulting shape derivative is different from the classical one, used in the level-set method, since the lattice infill is following the shape and therefore contributes an additional term in the shape derivative (see Lemma 2). Section 4 describes the algorithm and its numerical implementation. The effectiveness of the method is illustrated by several 2-d numerical examples in Section 5.

2 | DESCRIPTION OF THE PROBLEM

For the sake of clarity, the present work is restricted to the 2-d case. Nevertheless, all results can be extended to the 3-d case (this is well documented for the homogenization and the level-set method; the dehomogenization method has recently been extended to 3-d in Reference 28). Let $D \subset \mathbb{R}^2$ be the bounded working domain. The admissible shapes or structures, $\Omega \subset D$, are subsets of D which are bounded open sets occupied by an elastic material (infill). Instead of being homogeneous, the material is assumed to feature a micro-structure and is characterized by its homogenized elastic tensor A^* . The boundary of Ω is comprised of three disjoint parts, such that $\partial\Omega = \Gamma_D \cup \Gamma_N \cup \Gamma$, with Dirichlet conditions applied on Γ_D , nonhomogeneous Neumann conditions on Γ_N , while Γ is traction free. For simplicity, only Γ is subject to optimization. The displacement field u is the solution of the elasticity system:

$$\begin{cases} \operatorname{div}(A^*e(u)) = 0 & \text{in } \Omega \\ u = 0 & \text{on } \Gamma_D \\ A^*e(u)n = g & \text{on } \Gamma_N \\ A^*e(u)n = 0 & \text{on } \Gamma \end{cases}, \quad (1)$$

where $e(u) = \frac{1}{2}(\nabla u + \nabla u^T)$ is the strain tensor and g denotes the boundary forces.

2.1 | Lattice infill

Among the plethora of materials that can be used as infill, lattices are of particular interest since they are easily parametrized and manufactured. In addition, structural optimization including lattices has been well studied^{29,30} and recent works on the dehomogenization of optimized lattice infills²⁵⁻²⁷ provide a useful framework for their direct exploitation in additive manufacturing.

As lattice we consider a graded (spatially varying) elastic composite material made of two phases: void and an isotropic solid phase whose elastic tensor will be denoted by A . The homogenized tensor of the composite material A^* is constructed in two steps. First, we consider a square periodicity cell, denoted $Y_0(m)$, with a rectangular hole, parametrized via two geometric parameters $m = (m_1, m_2) \in [0; 1]^2$ (see Figure 1). Using (modulated) periodic homogenization,^{9,10} we obtain an homogenized orthotropic elastic tensor, which we denote by $A_0^*(m)$. Then, we orient $A_0^*(m)$ according to an angle $\alpha \in L^\infty(\Omega, [0; 2\pi])$. Hence the complete elasticity tensor reads:

$$A^*(m(x), \alpha(x)) = R(\alpha(x))A_0^*(m(x))R(\alpha(x))^T,$$

where $R(\alpha(x))$ is the fourth-order tensor corresponding to a rotation of angle $\alpha(x)$ for symmetric matrices. To simplify the notation, we omit in the sequel the spatial dependency of A^* .

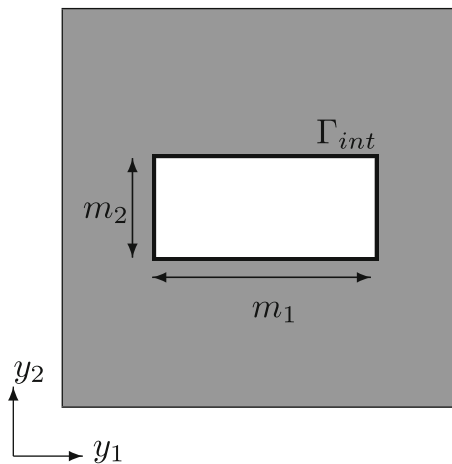


FIGURE 1 Periodicity cell $Y_0(m)$

The material density is denoted $\rho(m) \in [0; 1]$ and its value is

$$\rho(m) = 1 - m_1 m_2 . \quad (2)$$

When $\rho(m) = 0$ (which happens only for $m_1 = m_2 = 1$), the composite material is void, while $\rho(m) = 1$ (which happens either for $m_1 = 0$ or for $m_2 = 0$) corresponds to a fully solid material (with a thin crack if one of the m_i is not zero).

Remark 1. We emphasize that our approach is not restricted to the particular microstructure of Figure 1 and can be easily generalized to any other parametrized orthotropic lattice material.

2.2 | Optimization problem

2.2.1 | General setting

The goal is to optimize the shape Ω , as well as the parameters of its graded lattice infill (m, α) , in order to minimize a cost function denoted by $J(\Omega, m, \alpha)$. We restrict ourselves to the compliance of the structure, namely:

$$J(\Omega, m, \alpha) = \int_{\Omega} A^*(m, \alpha) e(u) : e(u) dx , \quad (3)$$

where u is solution of (1). As usual, a mass constraint is imposed on the structure. The minimization problem reads:

$$\begin{aligned} \inf_{\Omega \in \mathcal{U}_{ad}, m \in \mathcal{P}_{ad}, \alpha \in L^\infty(\Omega, [0; 2\pi])} & \int_{\Omega} A(m, \alpha) e(u) : e(u) dx \\ \text{such that} \quad & M(\Omega, m) = \int_{\Omega} \rho(m) dx = M_T, \end{aligned} \quad (4)$$

where $\rho(m)$ is defined by (2), M_T denotes the target mass, \mathcal{U}_{ad} the set of admissible shapes

$$\mathcal{U}_{ad} = \left\{ \Omega \subset D \mid \Gamma_N \subset \partial\Omega, \Gamma_D \subset \partial\Omega \right\},$$

and \mathcal{P}_{ad} is the set of admissible geometric parameters of the lattice :

$$\mathcal{P}_{ad} = L^\infty(\Omega, [0; 1]^2).$$

2.2.2 | Constrained setting

In practice, during the optimization process, in the absence of other constraints, the density of the lattice infill has to be restricted by a minimum value. Indeed, if not, the lattice infill can be void at some places, see Section 5.1.1. In such a case, there is no need to have an exterior boundary and the shape Ω can simply be the whole domain D . To avoid this problem and to get a clearly defined exterior boundary, it is therefore required to have a strictly positive minimal density of the infill. It turns out to be much simpler to impose a lower bound on the geometric parameters m_i of the lattice, rather than on the density $\rho(m)$. Hence, an upper bound for the size of the rectangular hole is introduced, $0 < m_{\max} < 1$, and the set of admissible geometric parameters is defined by

$$\mathcal{P}_{ad} = L^\infty(\Omega, [0; m_{\max}]^2).$$

The above definition of the constrained set \mathcal{P}_{ad} is not completely satisfactory since it forbids the rectangular hole to cut the cell and thus the microstructure $Y_0(m)$ can never be that of a rank-one laminate, made of only two parallel bars (although it is known that rank-one laminates are optimal for uni-axial stress).

Remark 2. If one insists on working only with the density, and not with the parameters m_i , another possibility is to add to the objective function a penalization term of the type

$$\int_{\Omega} |f(\rho(x))|^2 dx,$$

where f is a penalization function, nearly equal to 1 for low densities and equal to zero for other densities. For a threshold value $0 < \rho_{\min} < 1$, one example is

$$f(\rho) = \begin{cases} \frac{1}{2} \left(\cos \left(\frac{\pi \rho}{\rho_{\min}} \right) + 1 \right) & \text{if } \rho < \rho_{\min}, \\ 0 & \text{if } \rho \geq \rho_{\min}. \end{cases}$$

This idea has not been pursued further here.

2.2.3 | Coating

Using a coating for infill structures can be motivated by manufacturing or even functional reasons. In the first case, the coating acts as a protection layer from its environment (dust, external objects, etc.), while the latter holds true when the boundary is of key importance for its mechanical efficiency (acoustics, fluids, electro-magnetics, etc.). Moreover, when a dehomogenization step follows the optimization of a composite material, the post-treatment from useless tiny features proves to be significantly simplified for coated structures.

The coating region can be easily provided by a geometric description using the signed distance function to the domain Ω .

Definition 1. Let $\Omega \subset \mathbb{R}^2$ be a Lipschitz open set. The *signed distance function* to Ω , denoted by $d_\Omega : \mathbb{R}^2 \rightarrow \mathbb{R}$, is defined as:

$$d_\Omega(x) = \begin{cases} -d(x, \partial\Omega) & \text{if } x \in \Omega \\ 0 & \text{if } x \in \partial\Omega, \\ d(x, \partial\Omega) & \text{if } x \notin \overline{\Omega} \end{cases} \quad (5)$$

where $d(\cdot, \partial\Omega)$ is the usual Euclidean distance to the boundary $\partial\Omega$.

Then, the coating region of uniform size h , denoted Ω_h in the following, is defined by:

$$\Omega_h = \{x \in \Omega \mid d_\Omega(x) > -h\}. \quad (6)$$

Imposing numerically the coating area around the boundary of the evolving shape can be done in several ways. Here, for simplicity, we choose a penalization approach (see Remark 3 for another possible multi-material approach). To enforce the coating region, a penalization function is introduced which forces the material density $\rho(m)$, defined by Equation (2), to be close to 1:

$$P_{\text{coat}}(\Omega, m) = \left(\int_{\Omega_h} (\rho(m) - 1) dx \right)^2.$$

Then, a penalized optimization problem is solved:

$$\begin{aligned} & \inf_{\Omega \in \mathcal{V}_{ad}, m \in \mathcal{P}_{ad}, \alpha \in L^\infty(\Omega; [0; 2\pi])} \int_{\Omega} A(m, \alpha) e(u) : e(u) dx + \gamma P_{\text{coat}}(\Omega, m) \\ & \text{s.t.} \quad M(\Omega, m) = \int_{\Omega} \rho(m) dx = M_T, \end{aligned} \quad (7)$$

for a given parameter $\gamma > 0$. When γ is set to a large enough value, the penalization P_{coat} is vanishingly small, meaning that the coating region Ω_h is filled with the pure material. In practice, our experience shows that scaling the coefficient γ like h^{-2} works well.

Remark 3. Another, more explicit, way of enforcing the coating amounts to modify the elasticity tensor, so that it takes the coating region into consideration. Assuming that the coating is made of the same phase A as in the composite, the total elastic tensor \hat{A}^* reads:

$$\hat{A}^* = \chi_{\Omega_h} A + (1 - \chi_{\Omega_h}) A^*(m, \alpha),$$

where χ_{Ω_h} denotes the characteristic function of the domain Ω_h . As a result, the optimization becomes a multimaterial problem, which introduces several difficulties with respect to the shape derivation (see Reference 31 for a detailed presentation on multimaterial shape and topology optimization). To avoid these technicalities and since in numerical practice the penalization approach works well, we did not pursue the multimaterial approach.

3 | SENSITIVITY ANALYSIS

This section establishes first-order derivatives of the involved functionals with respect to the optimization parameters, in order to use them in a gradient optimization algorithm.

3.1 | Derivation with respect to the lattice parameters

As is well known, optimizing the compliance (3) for the state equation (1) is a self-adjoint problem.³² In other words, no adjoint state is required. Its derivative with respect to the parameters of the micro-structure, (see Reference 9 for example), reads:

$$\frac{\partial J}{\partial m_i}(\Omega, m, \alpha) = - \int_{\Omega} \frac{\partial A^*}{\partial m_i}(m, \alpha) e(u) : e(u) dx, \quad (8)$$

where

$$\frac{\partial A^*}{\partial m_i}(m, \alpha) = R(\alpha) \frac{\partial A_0^*}{\partial m_i}(m) R(\alpha)^T.$$

Since there is no explicit formula for the homogenized tensor $A_0^*(m)$ with respect to its parameters m_i , the computation of $\frac{\partial A_0^*}{\partial m_i}(m)$ is performed numerically (see Reference 27 for details). A similar formula holds true for the derivative of the compliance with respect to the orientation angle α , that is,

$$\frac{\partial J}{\partial \alpha}(\Omega, m, \alpha) = - \int_{\Omega} \frac{\partial A^*}{\partial \alpha}(m, \alpha) e(u) : e(u) dx. \quad (9)$$

Although formula (9) could be computed, in practice we do not use it. Indeed, in the specific case of single load compliance minimization, the optimal orientation of orthotropic materials is explicitly given by the principal directions of the stress field $\sigma = A^*(m, \alpha) e(u)$ (see Reference 29 and, for the 3D case, Reference 33). By choosing to align the vector $(\cos(\alpha); \sin(\alpha))$ with the eigenvector of σ of smallest eigenvalue (possibly negative), the angle α is then defined modulo π .

For multiple loads compliance minimization, the optimal orientation at one point still only depends on the values of the local stress fields and is solution of a 1-d minimization problem. Thus the global minimization of the cost function with respect to the orientation α remains relatively easy even without any explicit expression. If a more general cost function is to be considered, the gradient method could be used to optimize the orientation α together with the other parameters m_i of the microstructure. Nevertheless, it could be more prone to get trapped in local minima.

3.2 | Shape differentiation

3.2.1 | Definition

We rely on Hadamard's method to compute shape derivatives and more specifically we adopt the approach of Murat and Simon.³⁴ Let Ω be a smooth reference open set, $\theta \in W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$ and Id the identity map. If θ is small enough, the map $\text{Id} + \theta$ is a diffeomorphism in \mathbb{R}^2 . Hence we can consider the domains:

$$\Omega_{\theta} = (\text{Id} + \theta)(\Omega).$$

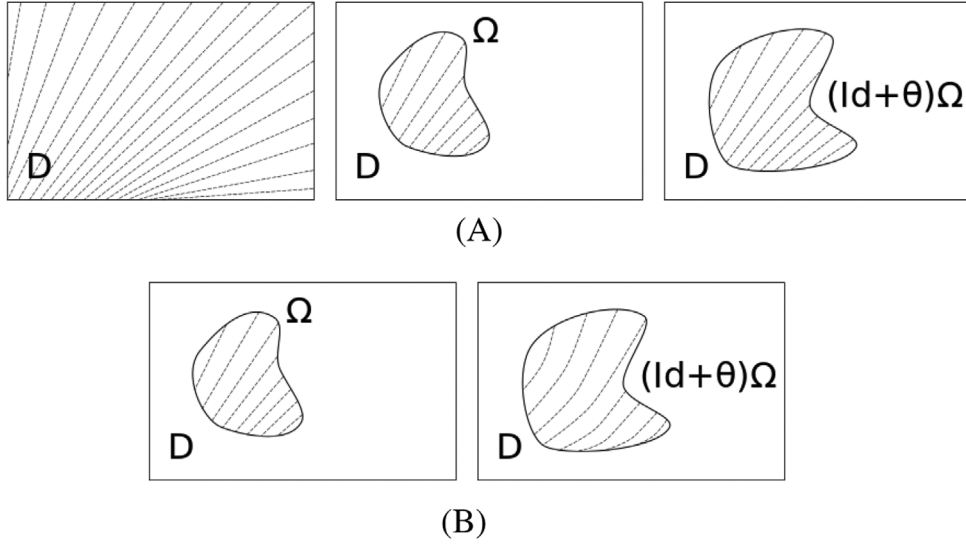


FIGURE 2 Two possible variations of the shape Ω and its infill by a diffeomorphism $(\text{Id} + \theta)$. The dotted lines may represent the isolines of the local density of the lattice material. A, The lattice material is defined on the working domain D (left). The shape Ω is filled by this lattice material (center). When the shape is deformed (right), the lattice material is kept fixed, defined in D . B, The lattice material is defined only on the shape Ω (left). When the shape Ω is deformed by $(\text{Id} + \theta)$, the lattice material is also transported by $(\text{Id} + \theta)$ (right)

Definition 2. A functional $F(\Omega)$ is said to be shape differentiable at Ω if there exists a continuous linear form $F'(\Omega)$ on $W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$ such that, for all $\theta \in W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$:

$$F((\text{Id} + \theta)(\Omega)) = F(\Omega) + F'(\Omega)(\theta) + o(\theta) \quad \text{with} \quad \lim_{\theta \rightarrow 0} \frac{|o(\theta)|}{\|\theta\|} = 0,$$

where $\|\theta\|$ is the norm of θ in $W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$ and F' is the shape derivative of the functional F .

We recall a classical result on the shape derivative of volume integrals (see Reference 32 for a proof).

Lemma 1. For $f \in W^{1,1}(\mathbb{R}^2)$ define

$$F(\Omega) = \int_{\Omega} f(x) \, dx.$$

Then F is differentiable at Ω and, for all $\theta \in W^{1,\infty}(\mathbb{R}^2; \mathbb{R}^2)$,

$$F'(\Omega)(\theta) = \int_{\Omega} \text{div}(\theta(x)f(x)) \, dx = \int_{\partial\Omega} \theta(s) \cdot n(s)f(s)ds.$$

3.2.2 | Compliance

To compute the shape derivative of the compliance (3), one has first to define how the material properties, that is, the elastic tensor of the graded lattice infill, depend on shape variations. As already said, there are two modeling possibilities: Eulerian and Lagrangian.

In an Eulerian approach, the graded material is defined (or extended somehow) in the whole domain D and is kept fixed when the macroscopic shape Ω is deformed by $\text{Id} + \theta$. The new shape $(\text{Id} + \theta)\Omega$ is filled with the same infill, defined on $D \cap (\text{Id} + \theta)\Omega$, see Figure 2A. In such a case, the standard framework described in Reference 35 applies and the classical results presented therein could be used.

In a Lagrangian approach, the infill $A^*(x)$ is also transported by the diffeomorphism $\text{Id} + \theta$, see Figure 2B. Hence the new shape $\Omega_{\theta} = (\text{Id} + \theta)\Omega$ is filled with the transported infill material, whose tensor is given by:

$$A_\theta^* = A^*(m, \alpha) \circ (\text{Id} + \theta)^{-1} . \quad (10)$$

In particular, it implies that the lattice infill follows the deformation of the shape Ω . The interpretation of (10) is that, in a Lagrangian setting, that is, mapping back the infill to the reference configuration, the tensor $A_\theta^* \circ (\text{Id} + \theta) = A^*(m, \alpha)$ is independent of the vector field θ . Our implementation relies on the Lagrangian approach because the Eulerian setting raised several issues. First, the infill has to be extended outside the shape before its boundary can be moved. Second, when a coating around the shape boundary is used, moving this boundary would require a shape derivative for the interface between the infill and the coating. Although it is a classical multiphase optimization problem, it adds further technicalities which are avoided in our simpler Lagrangian framework.

Lemma 2. *Assume the infill parameters (m, α) are C^1 on Ω and the solution u of (1) belongs to $H^2(\Omega)^2$ (this is true for a smooth shape and a smooth loading). For all $\theta \in W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$ such that $\theta = 0$ on $\Gamma_D \cup \Gamma_N$, the shape derivative of the compliance, defined by Equation (3), reads:*

$$J'(\Omega, m, \alpha)(\theta) = - \int_{\Gamma} A^*(m, \alpha) e(u) : e(u) \theta \cdot n ds + \int_{\Omega} \theta \cdot \nabla A^*(m, \alpha) e(u) : e(u) dx . \quad (11)$$

Remark 4. In Equation (11) the notation J' denotes the shape derivative, computed for given m and α . It is thus a partial derivative.

Proof. We rely on the Lagrangian method of C ea (see, eg, Reference 32). For vector fields $\theta \in W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$, we consider deformed sets $\Omega_\theta = (\text{Id} + \theta)\Omega$ with infill A_θ^* , defined by (10), and introduce the following Lagrangian

$$\mathcal{L}(\theta, v, q) = \int_{\Gamma_N} g \cdot v ds - \int_{\Omega_\theta} A_\theta^* e(v) : e(q) dx + \int_{\Gamma_N} g \cdot q ds, \quad (12)$$

where v and q belong to $H^1(\Omega)^2$ and vanish on Γ_D . As usual, the Lagrangian is defined as the sum of the objective function and of the variational formulation satisfied by the primal state. Note that the compliance, defined by Equation (3), is also equal to the work done by the load. Since it is assumed that $\theta = 0$ on $\Gamma_D \cup \Gamma_N$, that is, these boundaries are kept fixed, the three variables (θ, v, q) are independent, which ensures that the following computations make sense.

Differentiating the Lagrangian with respect to q and requiring that this partial derivative vanishes yields the variational formulation for $v = u$, solution of Equation (1). Differentiating the Lagrangian with respect to v and requiring that this partial derivative vanishes yields the variational formulation for the adjoint, which is nothing else than $q = u$, solution of Equation (1). Finally, differentiating the Lagrangian with respect to θ and evaluating it at $(v, q) = (u, u)$ gives the shape derivative of the objective function (see References 9,32)

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \theta}(0, v, q)(\theta) &= J'(\Omega, m, \alpha)(\theta) = - \int_{\Gamma} A^*(m, \alpha) e(u) : e(u) \theta \cdot n ds \\ &\quad + \int_{\Omega} \theta \cdot \nabla A^*(m, \alpha) e(u) : e(u) dx, \end{aligned}$$

by applying Lemma 1 and computing the derivative of $\theta \rightarrow A_\theta^*$ by a simple Taylor expansion for small θ

$$A_\theta^* = A^*(m, \alpha) \circ (\text{Id} + \theta)^{-1} = A^*(m, \alpha) - \theta \cdot \nabla A^*(m, \alpha) + o(\theta).$$

■

Developing a bit further the second term of formula (11) for the shape derivative of the compliance, we obtain:

$$\begin{aligned} J'(\Omega, m, \alpha)(\theta) &= - \int_{\Gamma} R(\alpha) A_0^*(m) R(\alpha)^T e(u) : e(u) \theta \cdot n ds \\ &\quad + \int_{\Omega} R(\alpha) \frac{\partial A_0^*}{\partial m}(m) R(\alpha)^T e(u) : e(u) \theta \cdot \nabla m dx \\ &\quad + \int_{\Omega} \left(\frac{\partial R}{\partial \alpha}(\alpha) A_0^*(m) R(\alpha)^T + R(\alpha) A_0^*(m) \frac{\partial R^T}{\partial \alpha}(\alpha) \right) e(u) : e(u) \theta \cdot \nabla \alpha dx . \end{aligned} \quad (13)$$

As mentioned in Section 3.1, since the optimization with respect to the angle orientation is performed explicitly at each iteration using Pedersen formulas,²⁹ the last term in Equation (13) vanishes because of the optimality conditions

with respect to the orientation angle α . Therefore, denoting by α^* the optimal orientation, the shape derivative of the compliance reduces to:

$$\begin{aligned} J'(\Omega, m, \alpha^*)(\theta) = & - \int_{\Gamma} R(\alpha^*) A_0^*(m) R(\alpha^*)^T e(u) : e(u) \theta \cdot n \, ds \\ & + \int_{\Omega} R(\alpha^*) \frac{\partial A_0^*}{\partial m}(m) R(\alpha^*)^T e(u) : e(u) \theta \cdot \nabla m \, dx. \end{aligned} \quad (14)$$

Formula (14) is used in our numerical simulations.

3.2.3 | Mass

Following the same analysis as in Section 3.2.2, the shape derivative of the mass $M(\Omega, m)$ reads:

$$M'(\Omega, m)(\theta) = \int_{\Gamma} \rho(m) \theta \cdot n \, ds - \int_{\Omega} \frac{\partial \rho}{\partial m}(m) \theta \cdot \nabla m \, dx.$$

3.2.4 | Coating functional

The coating functional P_{coat} is posed on the coating domain Ω_h , which is defined in Equation (6) via the signed distance function to the domain Ω . Therefore, the shape derivative of the signed distance d_{Ω} is required. Details concerning the shape derivation of d_{Ω} can be found in References 31, 36, and 37. Only the basic information that we need for our results are recalled here.

Definition 3. The **skeleton** (or ridge) of Ω , denoted by Σ , is the set of points $x \in \mathbb{R}^2$ such that the minimum in

$$d(x, \partial\Omega) = \min_{y \in \partial\Omega} |x - y|,$$

is achieved by at least two distinct points y of $\partial\Omega$.

Proposition 1. Assume Ω is an open set of class C^1 and fix a point $x \notin \Sigma$, outside the skeleton of Ω . The map $\theta \mapsto d_{(\text{Id}+\theta)\Omega}(x)$ is Gateaux differentiable at $\theta = 0$, as an application from $W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$ into \mathbb{R} and its derivative is

$$d'_{\Omega}(\theta)(x) = -\theta(p_{\partial\Omega}(x)) \cdot n(p_{\partial\Omega}(x)), \quad (15)$$

where $p_{\partial\Omega}(x)$ is the orthogonal projection of x on $\partial\Omega$, which is uniquely defined for $x \notin \Sigma$.

Our main result, which generalizes Lemma 1, is the following.

Proposition 2. For $f \in W^{1,1}(\mathbb{R}^2)$ define

$$K(\Omega) = \int_{\Omega_h} f(x) dx.$$

For a smooth open set Ω of class C^2 and a sufficiently small thickness $h > 0$, its shape derivative reads, for all $\theta \in W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$,

$$K'(\Omega)(\theta) = \int_{\partial\Omega} (f(x) - (1 - hH)f(x - hn(x))) \theta(x) \cdot n(x) \, ds,$$

where $H = \text{div} n$ is the mean curvature of $\partial\Omega$.

Proof. Let ζ be the function defined from \mathbb{R} to \mathbb{R} by

$$\zeta(t) = \begin{cases} 1 & \text{if } -h < t < 0 \\ 0 & \text{otherwise} \end{cases}. \quad (16)$$

Then, by Definition (6), one has

$$K(\Omega) = \int_{\mathbb{R}^2} \zeta(d_\Omega(x)) f(x) dx.$$

If Ω is C^2 and $h > 0$ is small enough, the skeleton does not touch or cross Ω_h and one can differentiate the signed distance function everywhere in Ω_h . Therefore, using Proposition 1, the shape derivative of $K(\Omega)$ is:

$$\begin{aligned} K'(\Omega)(\theta) &= \int_{\mathbb{R}^2} f(x) \zeta'(d_\Omega(x)) d'_\Omega(\theta)(x) dx \\ &= - \int_{\mathbb{R}^2} f(x) \zeta'(d_\Omega(x)) \theta(p_{\partial\Omega}(x)) \cdot n(p_{\partial\Omega}(x)) dx \\ &= \int_{\partial\Omega} f(x) \theta(x) \cdot n(x) ds - \int_{\Gamma_h} f(x) \theta(p_{\partial\Omega}(x)) \cdot n(p_{\partial\Omega}(x)) ds, \end{aligned}$$

because $\zeta'(t) = \delta(t+h) - \delta(t)$ where δ is the Dirac mass at 0, and Γ_h is the inner boundary of the coating Ω_h . Then, recalling that, for $x \in \Omega_h$, $p_{\partial\Omega}(x) = x - d_\Omega(x) n(x)$, and performing the change of variable $\tilde{x} = p_{\partial\Omega}(x)$ in the integral on Γ_h , which has the Jacobian $(1 - hH) > 0$, one gets

$$\int_{\Gamma_h} f(x) \theta(p_{\partial\Omega}(x)) \cdot n(p_{\partial\Omega}(x)) ds = \int_{\partial\Omega} f(\tilde{x} - hn(\tilde{x})) \theta(\tilde{x}) \cdot n(\tilde{x}) ds,$$

from which the desired result follows. In truth, to make this computation fully rigorous, one has first to regularize the step function ζ with a small parameter $\epsilon > 0$ and then pass to the limit in the derivative as ϵ goes to zero. This is a standard process that we safely leave to the reader. ■

The above result leads straightforwardly to the derivative of the coating penalization term $P_{\text{coat}}(\Omega, m)$ where, as before, the infill is assumed to follow the shape deformation.

Proposition 3. *For a smooth open set Ω of class C^2 and a sufficiently small thickness $h > 0$, the map $\theta \rightarrow P_{\text{coat}}((\text{Id} + \theta)\Omega, m \circ (\text{Id} + \theta)^{-1})$ is Gateaux differentiable at $\theta = 0$, as an application from $W^{1,\infty}(\mathbb{R}^2, \mathbb{R}^2)$ into \mathbb{R} , and its derivative reads:*

$$\begin{aligned} P'_{\text{coat}}(\Omega, m)(\theta) &= 2 \left(\int_{\Omega_h} (\rho(m) - 1) dx \right) \left(- \int_{\Omega_h} \frac{\partial \rho}{\partial m}(m) \nabla m \cdot \theta dx \right. \\ &\quad \left. + \int_{\Gamma} (\rho(m(s)) - (1 - hH)\rho(m(s - hn(s)))) \theta(s) \cdot n(s) ds \right). \end{aligned} \quad (17)$$

4 | NUMERICAL IMPLEMENTATION

4.1 | Level-set description

From a numerical point of view, the shape Ω is represented on a fixed mesh of the working domain D by the level-set method.³⁸ A level-set function ϕ is introduced and the shape $\Omega \subset D$ is described implicitly by

$$\begin{cases} \phi(x) = 0 & \text{if } x \in \partial\Omega \cap D \\ \phi(x) < 0 & \text{if } x \in \Omega \\ \phi(x) > 0 & \text{if } x \in D \setminus \overline{\Omega} \end{cases}.$$

Usually, the deformation of the shape Ω is performed by solving a non-linear Hamilton-Jacobi advection equation where the scalar normal velocity is given by the shape derivative. Note that alternatives approaches based on the level-set method like the ones proposed by Amstutz or Luo are possible.^{39,40} However, in the present context, the shape derivative in Equation (14) or (17) is made of two terms: one classical term on the boundary, depending only on the normal

component of the vector field θ , and another new term inside the shape, depending on all components of θ . Therefore, from the very structure of the shape derivative, it is clear that the advection velocity must be vector-valued, and not merely a scalar normal component. Therefore, one cannot use the usual nonlinear Hamilton-Jacobi advection equation. Rather, denoting by θ the velocity field deduced from shape differentiation (see the next subsection to find out how it is precisely obtained), we use the following linear transport equation

$$\frac{\partial \phi}{\partial t}(t, x) + \theta(x) \cdot \nabla \phi(t, x) = 0 \quad \text{in } [0, dt] \times D, \quad (18)$$

where t is some pseudo-time variable and the final time dt corresponds to the descent step in the optimization (dt has nothing to do with the time step for the numerical resolution of Equation (18)). Note that the velocity field θ is used for both advection of the shape and of the infill properties. Numerically, we use the *advect* library⁴¹ to solve (18) on an unstructured mesh. Moreover, the descent step dt is adapted as follows. At each iteration, if the newly computed homogenized structure is accepted, it is increased by 20%. On the contrary, if the newly computed structure is rejected, it is divided by two. The initialization of dt is given by:

$$dt = \frac{h_{\max}}{\|\theta\|_{L^\infty(D)}},$$

where h_{\max} is the maximal size of the edges of the mesh. The idea is to prevent the shape to move too much between two iterations. In order to avoid significant distortions of the level-set function, leading to numerical errors, as well as to define accurately the coating area, the level-set function $\phi(x)$ is reinitialized at each iteration as the signed-distance function of the current Ω , using the *mshdist* library.⁴² Finally, the classical “ersatz” material approach³⁵ is used to extend the state Equation 1 in the whole working domain D .

4.2 | Velocity extension and regularization

As shown in Section 3.2, the shape derivative for functionals including “transported” material properties is no more a surface integral, as in the classical framework of Hadamard’s method, where only the normal component of the advection field on the shape boundary is of interest. Instead, the vector field θ is defined both on the boundary and inside the shape Ω . Furthermore, to solve the transport equation (18), the advection field must be defined on the whole working domain D , thus θ needs to be extended to $D \setminus \Omega$.

We now explain how to deduce a vector field θ from the shape derivatives (14) or (17), which is defined everywhere in D and is indeed a descent direction. According to Hadamard theory, θ should belong to the Lipschitz space $W^{1,\infty}(D, \mathbb{R}^2)$ but, as is common numerical practice, we content ourselves in defining θ in the (slightly less smooth) Sobolev space $H^1(D, \mathbb{R}^2)$. In any case, a typical shape derivative is of the type

$$J'(\Omega, m)(\theta) = \int_{\partial\Omega} j(x) \theta \cdot n \, ds + \int_{\Omega} k(x) \theta \cdot \nabla m \, dx,$$

where j and k are two given scalar integrands. A naive choice would amount to choose

$$\theta(x) = \begin{cases} -j(x) n & \text{on } \partial\Omega, \\ -k(x) \nabla m(x) & \text{in } \Omega, \end{cases}$$

which is indeed a descent direction for the objective function $J(\Omega, m)$ but has the main disadvantage of being discontinuous at the boundary $\partial\Omega$. Therefore, another, more educated, choice of θ has to be made. Following the classical idea of derivative regularization,^{35,43,44} we identify the directional derivative with the $H^1(D, \mathbb{R}^2)$ scalar product. More precisely, an advection velocity field θ is computed as the solution of the following variational formulation in $H^1(D, \mathbb{R}^2)$: for all test functions $\xi \in H^1(D, \mathbb{R}^2)$,

$$\int_D (\eta^2 \nabla \theta : \nabla \xi + \theta \cdot \xi) \, dx = -J'(\Omega, m, \alpha)(\xi), \quad (19)$$

where J' is the shape derivative of the functional J , for example, Equation (14), and $\eta > 0$ is a small regularization coefficient (typically of the order of a mesh cell size). Taking $\xi = \theta$ in Equation (19) ensures that indeed the solution θ is a descent direction for $J(\Omega, m, \alpha)$. Furthermore, θ is well defined in the entire working domain D and not only on Ω .

To compute the surface integral that appears in the right-hand side of Equation (19) on a fixed mesh, we use a volumic approximation as proposed in Reference 45. The boundary integral of a function ψ defined on D is numerically approximated as:

$$\int_{\partial\Omega} \psi \, ds \approx \int_D \psi(x) \delta_\epsilon(x) dx, \quad (20)$$

where

$$\delta_\epsilon(x) = \begin{cases} 0 & \text{if } |d_\Omega(x)| > \epsilon, \\ \frac{1}{2\epsilon} \left(1 + \cos \left(\frac{\pi}{\epsilon} d_\Omega(x) \right) \right) & \text{otherwise,} \end{cases}$$

and $\epsilon > 0$ is a small coefficient of the order of the mesh size.

4.3 | Optimization algorithm

We combine several optimization methods: augmented Lagrangian for shape optimization, gradient descent with projection for the unit-cell parameters, and explicit optimization for the orientation angle.

4.3.1 | Augmented Lagrangian

In this section, we describe a simple augmented Lagrangian algorithm for minimizing a cost function $J(\Omega)$ under equality constraints

$$P_i(\Omega) = 0, \quad i = 1, \dots, I.$$

Of course, there are other more efficient optimization algorithms in topology optimization that have been successfully combined with the level-set method,^{46,47} but it is not the purpose of this article to discuss the important issue of optimization efficiency. Following Reference 48, we introduce the augmented Lagrangian function:

$$L(\Omega, \ell, \mu) = J(\Omega) - \sum_{i=1}^I \ell_i P_i(\Omega) + \sum_{i=1}^I \frac{\mu_i}{2} P_i^2(\Omega), \quad (21)$$

where $J(\Omega)$ is the cost function, $\ell = (\ell_i)_{i=1, \dots, I}$ are the Lagrange multipliers, and $\mu = (\mu_i)_{i=1, \dots, I}$ are the penalty parameters, used to enforce the constraints at convergence. The Lagrange multipliers are updated at each iteration n according to the relation $\ell_i^{n+1} = \ell_i^n - \mu_i P_i(\Omega_n)$ (see Reference 48 for more details). We also increase the penalty parameters every five iterations.

The augmented Lagrangian is used here only for the mass constraint. It is not used for the coating constraint of Section 2.2.3 since, in practice, a classical simple penalization is very efficient and yields quickly a dense coating, as desired.

4.3.2 | Pseudocode

To optimize the objective function $J(\Omega, m, \alpha)$, we rely on an alternate direction algorithm. More precisely, the shape Ω is updated by the level-set method every n_0 iterations, while the lattice infill parameters (m, α) are updated at all other iterations, that is $(n_0 - 1)$ times in a row. In practice, we set $n_0 = 5$. The algorithm is stopped when the objective function is no longer significantly decreasing, namely, $J_n - J_{n+1} < 10^{-8}$, where J_n is the value of the objective function at iteration n (which is of order 1 in all our examples). Moreover, a maximal amount of iterations is imposed, in practice here, 200 iterations.

The algorithm reads as follows:

1. Initialization of the shape Ω_0 and of the lattice parameters (m_0, α_0) .
2. Iteration for $n \geq 0$:
 - a. Computation of the solution u_n of the linearized elasticity system (1).
 - b. If $n \bmod n_0 \neq 0$, update the lattice infill parameters:
 - (i) Computation of the descent direction, using (8).
 - (ii) Updating the geometric parameters m_{n+1} by a projected gradient step.
 - (iii) Updating the orientation α_{n+1} by using Pedersen formulas.
 - (iv) Verification that the new infill improves the objective function, else, reduction of the step size and rejection of the new infill.
 - (v) The shape is kept: $\Omega_{n+1} = \Omega_n$.
 - c. If $n \bmod n_0 = 0$, update the macroscopic shape:
 - (i) Computation of the descent direction θ_{n+1}
 - (ii) Updating the shape Ω_{n+1} and the geometric parameters m_{n+1} by advection.
 - (iii) Updating the orientation α_{n+1} of the lattice material using Pedesern formulas.
 - (iv) Verification that the new shape and the new infill improve the objective function, else, reduction of the time interval dt and rejection of the new shape and of the new infill.

For details on the projected gradient algorithm for the geometric parameter m and on the Pedersen formula for the orientation α , the reader is referred to Reference 27.

4.4 | Dehomogenization process

The optimized microstructure is not a genuine structure. Indeed, the infill lattice is a homogenized material: it is equivalent to periodic cells of infinitely small size. In other words, the optimized homogenized structure is not straightforwardly manufacturable. Hence, it has first to be *dehomogenized* before it can be built. The dehomogenization process was first introduced by Pantz and Trabelsi,²⁵ for rank laminates materials. It has been further generalized to other microstructures, in 2-d^{26,27} and in 3-d.²⁸ Here, the same method as in Reference 27 is used and we content ourselves in simply recalling the main ideas below.

The dehomogenization consists in building a sequence of genuine structures, that converges to the optimized homogenized one. Let $\psi(y, m)$ be a level-set function describing the perforated unit periodic cell $Y_0(m)$ (this level-set function ψ has nothing to do with the other level-set function ϕ which defines the shape Ω). In other words, $y = (y_1, y_2) \rightarrow \psi(y, m)$ is a periodic function, with period $[0; 1]^2$, such that

$$Y_0(m) = \{y \in [0; 1]^2 | \psi(y, m) < 0\}.$$

If the orientation of the periodic cells is kept constant in the whole working domain D , namely $\alpha(x) = 0$, an obvious reconstruction amounts to mesh the working domain with squares of size ε and to project in each square the corresponding local microstructure, parametrized by the local values of the geometric parameters m . The corresponding nonoriented structure Ω_ε^{no} is given by:

$$\Omega_\varepsilon^{no} = \left\{x \in \Omega | \psi\left(\frac{x}{\varepsilon}, m(x)\right) < 0\right\}.$$

If the cell orientation α varies in the working domain, the above idea has to be modified. A naive idea would be to simply rotate each cell by α , without deforming it. However, it cannot work since two neighboring squares with different orientation may not be well connected to each other: either they overlap, or there is a gap between them. In order to take into account the local orientation and to yield well connected genuine structures, cells have to be slightly distorted, see Figure 3. This distortion is mathematically given by a vector field, $\varphi : \mathbb{R}^2 \rightarrow \mathbb{R}^2$, a diffeomorphism whose inverse maps the periodic square grid, Figure 3A, on a distorted grid where each cell is optimally oriented, Figure 3C. (The notation

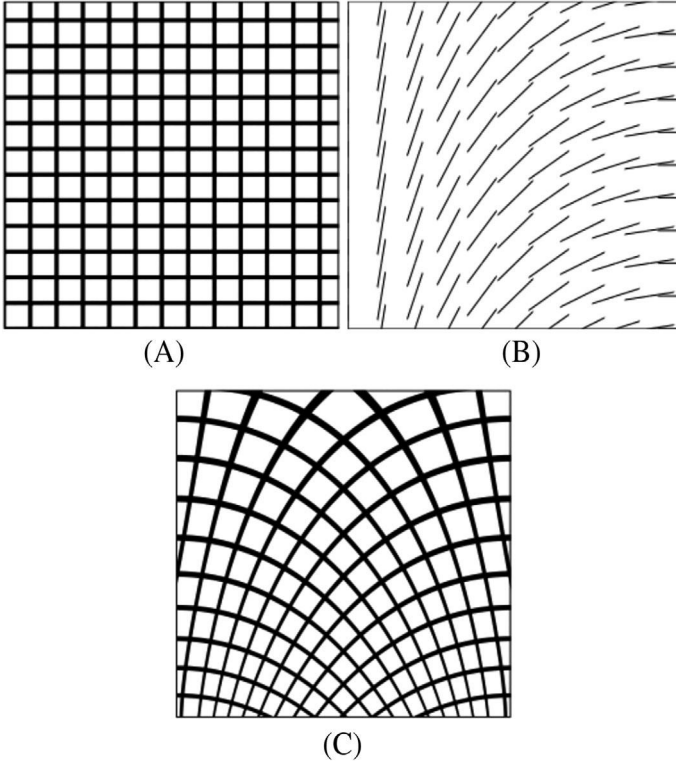


FIGURE 3 A regular grid (A) is associated to a direction field (B), giving the local orientation of each cell: it yields a distorted grid (C)

φ for this diffeomorphism should not be confused with ϕ for the level-set function of Ω .) The grid map $\varphi(x)$ is deduced from the optimal angle $\alpha(x)$. Indeed its gradient has to be locally aligned with the axes of the cell, whose directions are given by α , namely

$$\nabla \varphi(x) = e^{r(x)} \begin{pmatrix} \cos \alpha(x) & \sin \alpha(x) \\ -\sin \alpha(x) & \cos \alpha(x) \end{pmatrix},$$

where $r(x)$ is a scalar dilatation field. To solve the above equation for φ and r , the orientation angle α has to satisfy a conformality condition, namely, it must be harmonic. For theoretical, as well as practical details, on the solution process for φ , the reader is referred to Reference 27.

Eventually, a sequence of genuine, or projected, structures $\Omega_\epsilon(\varphi, m)$, taking into account the orientation of the cells is simply given by composing the level-set function ψ , the grid map φ , and the parameter field m as follows:

$$\Omega_\epsilon(\varphi, m) = \left\{ x \in \Omega \mid \psi \left(\frac{\varphi(x)}{\epsilon}, m(x) \right) < 0 \right\}.$$

The shape $\Omega_\epsilon(\varphi, m)$ is a modulated and oriented periodic domain (recall that $y \rightarrow \psi(y, m)$ is periodic). When ϵ is going to zero, Ω_ϵ is converging to the optimized homogenized structure characterized by the homogenized tensor $A^*(m, \alpha)$.

5 | NUMERICAL EXAMPLES

Our topology optimization method is implemented in the finite element software FreeFem++⁴⁹ (see Reference 50 for the use of FreeFem++ in optimal design). All unknowns are discretized using P_1 -functions.

5.1 | Noncoated structure

We first discuss numerical results of the optimization process for structures, without any coating.

FIGURE 4 Boundary conditions for the cantilever test case


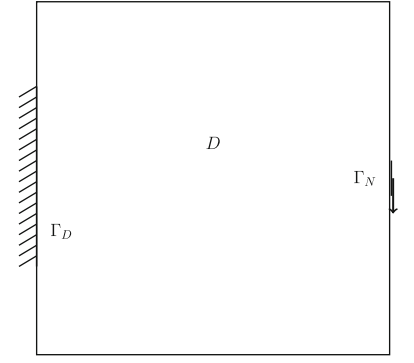


FIGURE 5 Density $\rho = 0.5$ of the initialization structure for the cantilever test case (the boundary of Ω is the red line)



FIGURE 6 Cantilever test case: optimized density for different values of m_{\max} . The boundary of the shape Ω is the red line. A, $m_{\max} = 0.8$. B, $m_{\max} = 0.9$. C, $m_{\max} = 1.0$

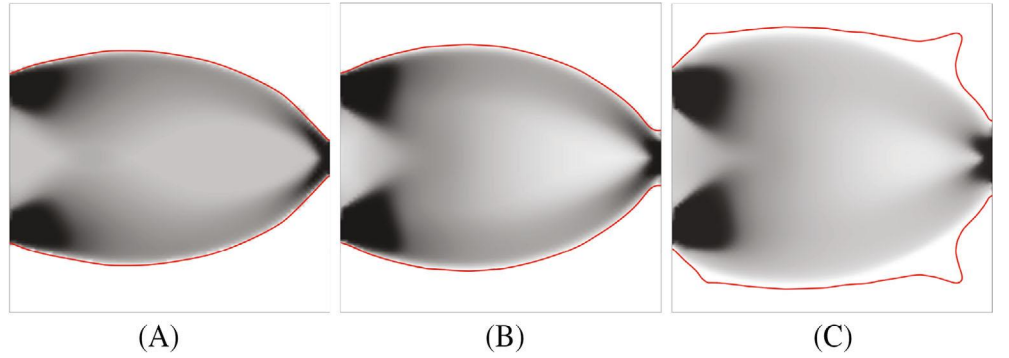

5.1.1 | Cantilever case

Our optimization algorithm is tested with a cantilever, see Figure 4 for the boundary conditions. The domain size is 20×20 and it is discretized by a structured triangular mesh, featuring about 800 vertices. A unit vertical load is applied on a central segment of length 1 on the right side. The structure is clamped on a central segment of length 10 on the left side. The target mass is fixed to 30% of the working domain, that is, $M_T = 120$. The initial shape Ω is displayed in Figure 5: it is slightly smaller than the whole working domain D and its border contains the Dirichlet and the Neumann boundaries, respectively, Γ_D and Γ_N . Its lattice infill is homogeneous and $m_1 = m_2 = \sqrt{0.5} \approx 0.7$, yielding an homogeneous density $\rho = 0.5$.

The optimized densities and shapes Ω for three values of the threshold m_{\max} , 1, 0.9, and 0.8 (see Section 2.2.2) are displayed in Figure 6. The final values of the objective function, the compliance, and the mass are given in Table 1. For these three designs, the mass constraint is satisfied ($M_T = 120$). The compliance and the area of the shape Ω , which is equal to $\int_{\Omega} dx$ and is different from the weight $\int_{\Omega} \rho(m) dx$, are given for comparison. The higher the maximal length of the hole m_{\max} , the higher the area of Ω . Indeed, as previously mentioned in Section 2.2.2, when the infill can have a zero density (meaning it is like void), the level-set function, which separates the infill from the external void phase, is mechanically meaningless. For $m_{\max} = 1$, the level-set do not disappear totally although it could have done so ; nevertheless, the area

m_{\max}	Compliance	Mass	Percentage of area of Ω w.r.t. D
0.8	2.87	30.1%	57%
0.9	2.74	29.9%	63%
1.0	2.63	30.2%	81%

TABLE 1 Numerical values for the three optimal designs of Figure 6

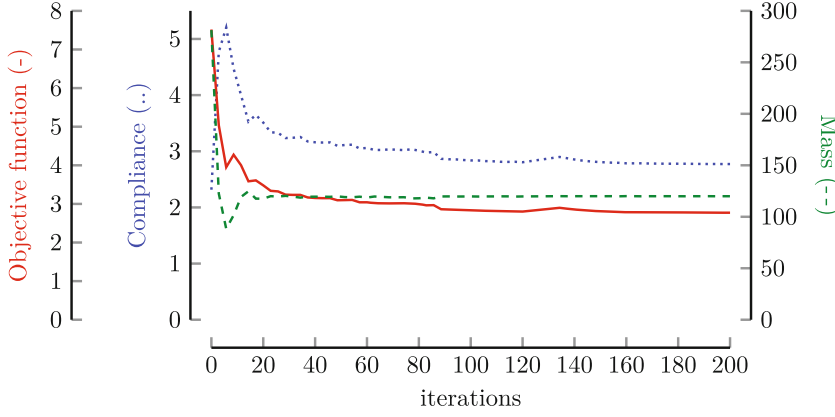


FIGURE 7 Convergence history of the objective function (red continuous line), the compliance (blue dotted line), and the mass of the structure (green dashed line) for the cantilever with $m_{\max} = 0.8$

of Ω is 85% of the one of the working domain D . However, the external boundary $\partial\Omega$ is surrounded by void (it lies in a white, or void, region on Figure 6C) and so has no impact on the final design. The areas of Ω for m_{\max} equal to 0.9 and 0.8 are smaller. The external boundary $\partial\Omega$ of the design is much more visible on Figure 6A,B, when $m_{\max} = 0.9$ or 0.8, since the transition between the infill and the exterior void phase is sharper.

Besides, the higher m_{\max} , the smaller the compliance. Indeed, the set of admissible structures is enriched when m_{\max} increases. Hence the optimized structure can only be more efficient for larger m_{\max} . From a mechanical point of view, it means that smooth transitions between the infill and the void (corresponding to large values of m_{\max}) are more efficient. However, in practice, after dehomogenization, such transition areas are not manufacturable because they involve very thin bars, which are impossible to manufacture and thus have to be removed before building the structures. This post-process alters the performance of the genuine structures. On the contrary, using a value of m_{\max} smaller than 1 during the optimization step, the optimized structure features no transition phase between infill and void, and thus no very thin bars. No post-process of the genuine structures is then required.

The convergence history for $m_{\max} = 0.8$ is displayed in Figure 7. First, in order to satisfy the mass constraint, the mass decreases abruptly, at the expense of the compliance. After around 20 iterations, the mass constraint is quite respected. The mass does not vary significantly anymore and the compliance decreases gradually.

The optimized homogenized structure for $m_{\max} = 0.8$ is dehomogenized in order to yield genuine structures, using the dehomogenization process described in Section 4.4 (following Reference 27). A diffeomorphism φ corresponding to the orientation is computed. Then, a sequence of genuine shapes $\Omega_\epsilon(\varphi, m)$ is constructed, see Figure 8, where ϵ stands for the characteristic period of the cells. The smaller ϵ , the finer the lattice infill.

5.1.2 | Bridge case

Our approach is now applied to a bridge problem, see Figure 9 for the boundary conditions. A unit vertical load is applied on a central unit segment of the bottom side. The structure is sliding on two unit segments of the bottom border, distant of one unit from the corners. The domain size is 22×13 and it is discretized by a structured triangular mesh, featuring about 1000 vertices. The target mass is fixed to 30% of the working domain and m_{\max} is set to 0.8. The optimized density and the optimized shape Ω are displayed in Figure 10. A sequence of genuine shapes $\Omega_\epsilon(\varphi, m)$ obtained by the dehomogenization process is displayed in Figure 11.

FIGURE 8 Projected structures $\Omega_\epsilon(\varphi, m)$ for several ϵ in the case of the cantilever, with $m_{\max} = 0.8$. A, $\epsilon = 0.4$. B, $\epsilon = 0.2$. C, $\epsilon = 0.1$ D, $\epsilon = 0.05$

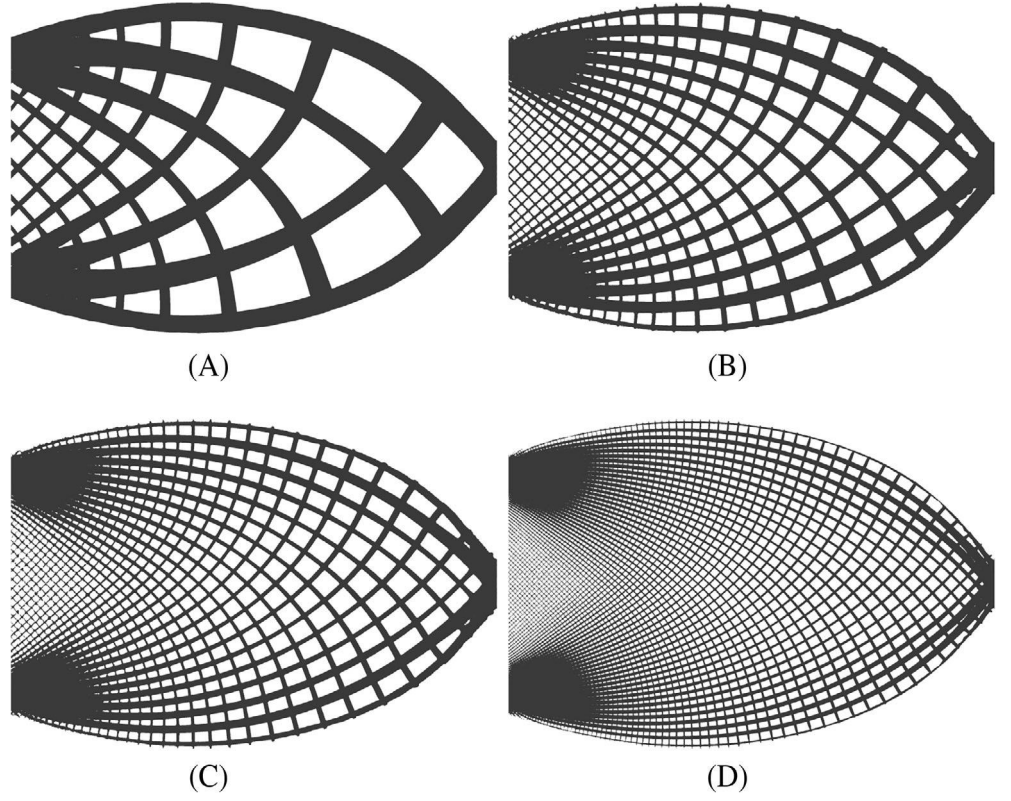


FIGURE 9 Boundary conditions for a bridge


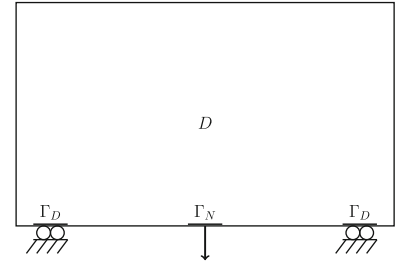


FIGURE 10 Bridge test case: optimized density for $m_{\max} = 0.8$. The boundary of the shape Ω is the red line

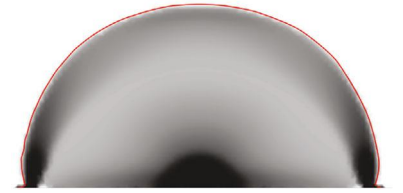

5.1.3 | Discussion

Thanks to the shape Ω , tracked by the level-set function ϕ , there is a clear border between the lattice infill inside the macroscopic structure and the outside of the structure. Consequently, the dehomogenized structures $\Omega_\epsilon(\varphi, m)$ are clean in the sense that no small, thin, or disconnected bars appear close to the boundary. This is a great advantage of the coupled optimization method over the topology optimization done only with the homogenization method as in Reference 27. Indeed, when lattice structures are optimized only with homogenization method, they feature a transition area in the domain D , where the density of the lattice goes slowly to zero. This yields very thin bars in this part of the domain during dehomogenization process and a post-treatment is then required to clean the dehomogenized structures. No such post-treatment is necessary here.

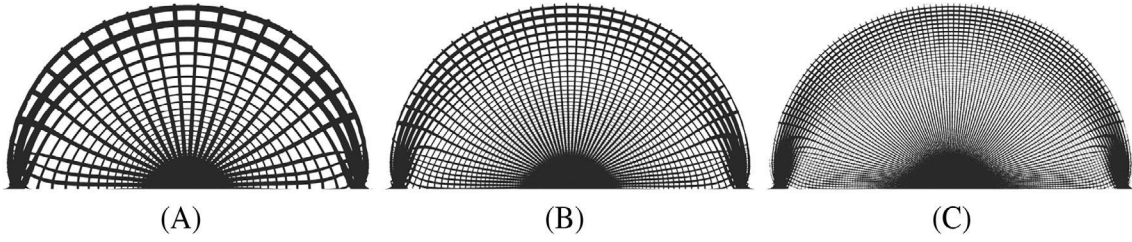


FIGURE 11 Projected structures $\Omega_\epsilon(\varphi, m)$ for several ϵ in the case of the bridge. A, $\epsilon = 0.2$. B, $\epsilon = 0.1$. C, $\epsilon = 0.05$

Moreover, since the compliance is minimized here, the cells are aligned with the principal directions of the stress, and so with the external boundary defined by the level-set function. Nevertheless, the external border is not perfectly smooth: it features stumps of bars or tiny holes. These small defaults are due to the inherent numerical approximations during the computation of the diffeomorphism φ . The same post-treatment method, as the one presented in Reference 27, could be used here to clean the structures $\Omega_\epsilon(\varphi, m)$. However, we can also fix this problem during the optimization process by imposing a coating to the structure, as we now explain.

5.2 | Coated structures

Our algorithm for coated structures is tested for a cantilever. The boundary conditions are identical to the ones in the previous subsection, see Figure 4. The Lagrange multiplier γ for the coating constraint is initially equal to 0.05, and the one for the mass constraint is initially equal to 0.1. They are increased of 20% each five iterations. No augmented Lagrangian was used for this example.

The mass constraint is set to 40% of the whole working domain.

The algorithm is applied with two different widths of the coating, $h = 0.7$ and $h = 2.1$, and two different upper bounds for the geometric parameters, $m_{\max} = 0.8$ and $m_{\max} = 0.9$ (see Section 2.2.2). The results are displayed in Figure 12. One can check that the final densities feature a coating of constant width.

For the thick coating ($h = 2.1$), the shapes are smaller than for the thin coating ($h = 0.7$). Indeed, the mass of the coating is closed to the target mass, and the inside of the shape has also to be filled with a nonzero density.

The optimized structures are dehomogenized according to the dehomogenization method of Section 4.4. Several projected structures $\Omega_\epsilon(\varphi, m)$ are displayed in Figure 13 for various values of the characteristic cell period ϵ . Those genuine shapes do not require any post-treatment to clean them. Indeed, the external boundary is smooth and regular, thanks to the presence of the coating.


5.3 | Optimization under design-dependent loads

Adding a uniform pressure load of magnitude p_0 on the optimizable boundary Γ , the state equation is modified as:

$$\begin{cases} \operatorname{div}(A^*e(u)) = 0 & \text{in } \Omega \\ u \cdot n = 0 & \text{on } \Gamma_D \\ A^*e(u)n \wedge n = 0 & \text{on } \Gamma_D \\ A^*e(u)n = g & \text{on } \Gamma_N \\ A^*e(u)n = p_0n & \text{on } \Gamma \end{cases} \quad (22)$$

Following the approach described in References 35 and 51, the surface integral due to the pressure load is approximated by a volume integral, as explained by Equation (20). The compliance (3) is still minimized. Assuming that Γ_D and

FIGURE 12 Optimized density of the coated cantilever for two different values of coating width h and of upper bound m_{\max} . A, $h = 0.7$ and $m_{\max} = 0.8$. B, $h = 0.7$ and $m_{\max} = 0.9$. C, $h = 2.1$ and $m_{\max} = 0.8$. D, $h = 2.1$ and $m_{\max} = 0.9$

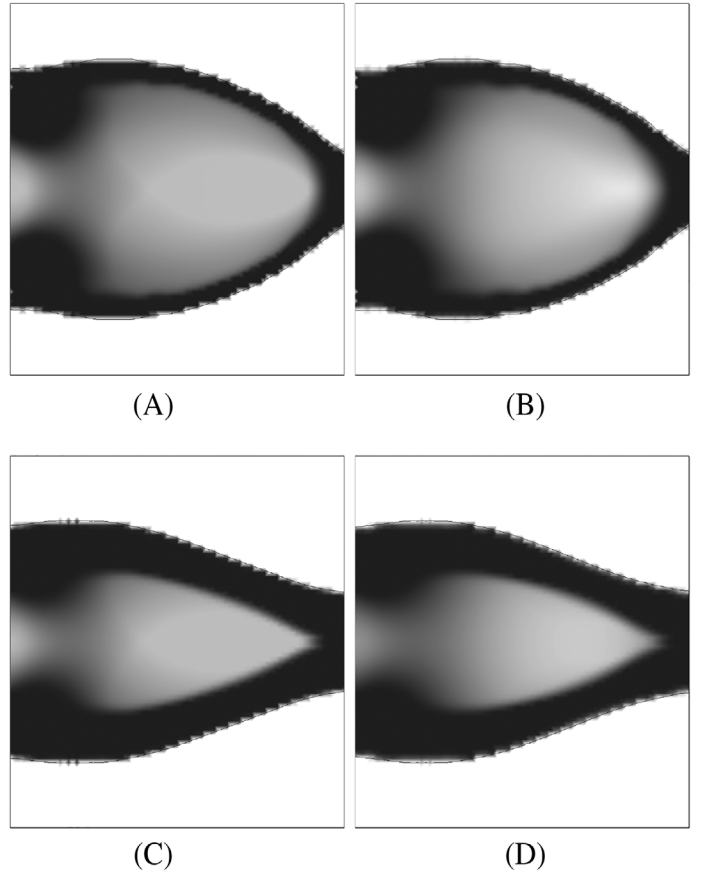


Γ_N are fixed, that is, $\theta = 0$ on these parts of the boundary, the shape derivative of the compliance is modified accordingly (see References 35 and 51):

$$\begin{aligned} J'(\Omega, m, \alpha^*)(\theta) = & - \int_{\Gamma} R(\alpha^*) A_0^*(m) R(\alpha^*)^T e(u) : e(u) \theta \cdot n \, ds \\ & + \int_{\Omega} R(\alpha^*) \frac{\partial A_0^*}{\partial m}(m) R(\alpha^*)^T e(u) : e(u) \theta \cdot \nabla m \, dx \\ & + \int_{\Gamma} 2 \operatorname{div}(u p_0) \theta \cdot n \, ds . \end{aligned} \quad (23)$$

We consider almost the same bridge case, as in Figure 9. The boundary conditions are identical except the addition of the pressure load p_0 on Γ and the sliding constraint on Γ_D instead of a clamp. For this bridge test case, the boundary Γ is just the upper boundary of the arch structure (see Figure 14). Several tests are run for different values of the pressure p_0 , from 0 to -0.05 . The value 0 corresponds to the setting of Section 5.1.2 and it is displayed only for the sake of comparison. The second value, -0.01 , yields a pressure loading equivalent to 30% of the unit vertical load. The third value, -0.05 is taken in order to have a pressure load 50% greater than the vertical load. Note that the precise values of the integrated pressure loads are unknown, since the length of the shape boundary is not fixed.

The target mass is equal to 30% of the mass of the working domain D . The upper bound on the geometric parameters is set to $m_{\max} = 0.8$, and $n_0 = 3$. Genuine shapes $\Omega_{\epsilon}(\varphi, m)$, obtained by the dehomogenization process of Section 4.4, are displayed in Figure 14, for three different values of the pressure p_0 , and a characteristic cell period ϵ equal to 0.1.


In the absence of pressure, the final structure does not feature a coating. It is quite close to the bridge structure, see Figure 11, but not exactly the same since the parameters of the algorithm are slightly different. When the magnitude of the pressure increases, a coating appears and becomes thicker. The shape optimization process takes well into account the design-dependent load.

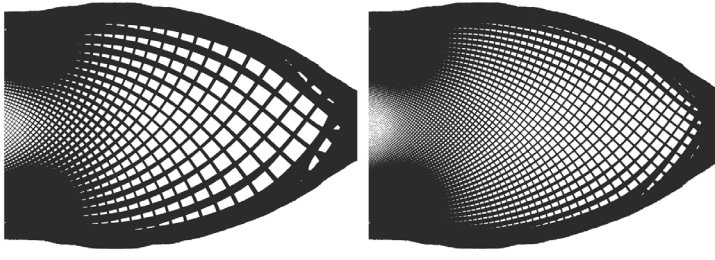

(A) $\varepsilon = 0.1$

(B) $\varepsilon = 0.05$


$h = 0.7$ and $m_{\max} = 0.8$

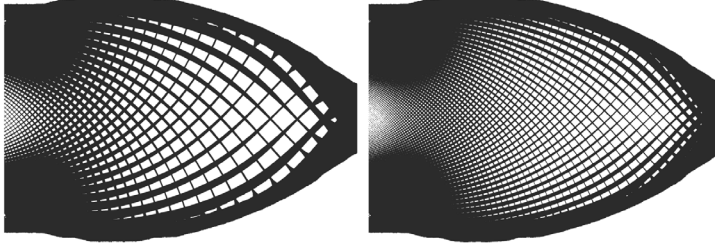

(C) $\varepsilon = 0.1$

(D) $\varepsilon = 0.05$


$h = 0.7$ and $m_{\max} = 0.9$

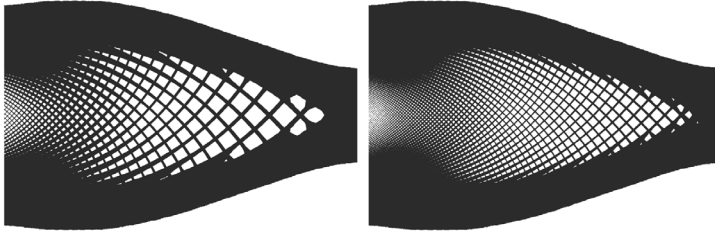

(E) $\varepsilon = 0.1$

(F) $\varepsilon = 0.05$

$h = 2.1$ and $m_{\max} = 0.8$

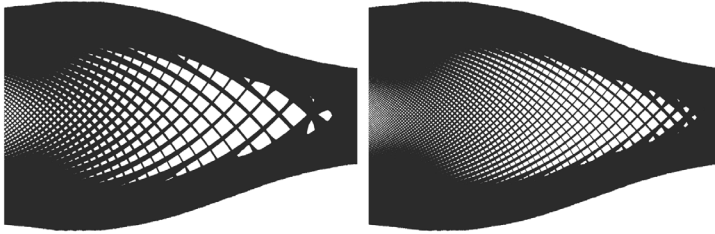

(G) $\varepsilon = 0.1$

(H) $\varepsilon = 0.05$

$h = 2.1$ and $m_{\max} = 0.9$

FIGURE 13 Projected structures $\Omega_\varepsilon(\varphi, m)$ for several ε in the case of the coated cantilever. A, $\varepsilon = 0.1$. B, $\varepsilon = 0.05$. C, $\varepsilon = 0.1$. D, $\varepsilon = 0.05$. E, $\varepsilon = 0.1$. F, $\varepsilon = 0.05$. G, $\varepsilon = 0.1$. H, $\varepsilon = 0.05$

We emphasize that such a pressure load can not be straightforwardly considered in shape optimization by the homogenization method. Indeed, an homogenized structure does not feature a clear external border. Hence, the coupled method presented here is a simple and effective way to address this problem.

6 | CONCLUSION

In this article, we have presented an approach for the simultaneous optimization of the lattice infill and the macroscopic shape of a structure, using the level-set method. Moreover, we have proposed a simple method to impose a coating around the shape boundary, which proves to reduce significantly the necessity for post-treatment once a dehomogenization step

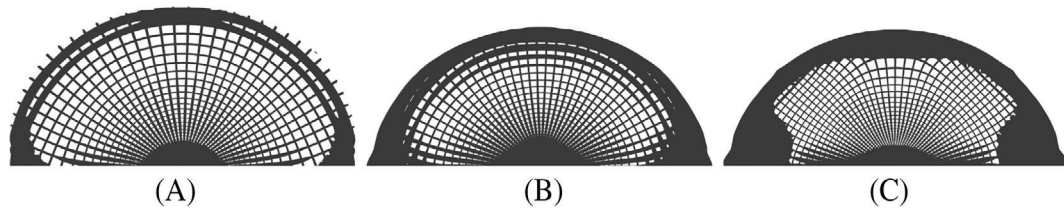


FIGURE 14 Dehomogenized structures $\Omega_\varepsilon(\varphi, m)$ under pressure loads, for several values of the pressure p_0 . A, $p_0 = 0$. B, $p_0 = -0.01$. C, $p_0 = -0.05$

follows. Several examples in the case of single load compliance minimization have been provided to illustrate the effectiveness of the approach in a 2-d setting. The approach has been also successfully applied to design-dependent loads given by an external pressure. Future works should tackle more realistic cases, that is, 3-d shapes and more general cost functions.


ACKNOWLEDGMENTS

The work of G. A. and P. G.-D. is supported by the SOFIA project, funded by BPI. The work of P. G. D. was part of her PhD, funded by a CIFRE contract with SAFRAN, the support of which is kindly acknowledged. The work of G.A. is also partially supported by the project ANR-18-CE40-0013 SHAPO financed by the French Agence Nationale de la Recherche (ANR). G. A. is a member of the DEFI project at INRIA Saclay Ile-de-France.

CONFLICT OF INTERESTS

The authors claim they have no conflict of interests.

ORCID

Grégoire Allaire  <https://orcid.org/0000-0002-8213-1092>

REFERENCES

1. Bendsoe M, Lund E, Olhoff N, Sigmund O. Topology optimization-broadening the areas of application. *Control and Cybernetics*. 2005;34(1):7.
2. Harzheim L, Graf G. A review of optimization of cast parts using topology optimization: I - topology optimization without manufacturing constraints. *Struct Multidiscip Optim*. 2005;30(5):491-497.
3. Harzheim L, Graf G. A review of optimization of cast parts using topology optimization: II - topology optimization with manufacturing constraints. *Struct Multidiscip Optim*. 2006;31(5):388-399.
4. G. Michailidis. *Manufacturing Constraints and Multi-phase Shape and Topology Optimization Via a Level-Set Method* (PhD thesis). Ecole Polytechnique X; 2014.
5. Zhou M, Fleury R, Shyy YK, Thomas H, Brennan J. Progress in topology optimization with manufacturing constraints. Paper presented at: Proceedings of the 9th AIAA MDO Conference AIAA; 2002:2002-4901.
6. Bendsoe MP, Kikuchi N. Generating optimal topologies in structural design using a homogenization method. *Comput Methods Appl Mech Eng*. 1988;71(2):197-224.
7. Suzuki K, Kikuchi N. A homogenization method for shape and topology optimization. *Comput Methods Appl Mech Eng*. 1991;93(3):291-318.
8. Allaire G, Kohn RV. Optimal design for minimum weight and compliance in plane stress using extremal microstructures. *Europ J Mech A Solids*. 1993;12(6):839-878.
9. Allaire G. *Shape Optimization by the Homogenization Method*. Vol 146. Berlin, Germany: Springer Science & Business Media; 2002.
10. Tartar L. *The General Theory of Homogenization: A Personalized Introduction*. Vol 7. New York, NY: Springer; 2009.
11. Rodrigues H, Guedes JM, Bendsoe M. Hierarchical optimization of material and structure. *Struct Multidiscip Optim*. 2002;24(1):1-10.
12. Podroužek J, Marcon M, Ninčević K, Wan-Wendner R. Bio-inspired 3d infill patterns for additive manufacturing and structural applications. *Materials*. 2019;12(3):499.
13. Clausen A, Aage N, Sigmund O. Exploiting additive manufacturing infill in topology optimization for improved buckling load. *Engineering*. 2016;2(2):250-257.
14. Yin S, Chen H, Li J, Yu T, Xu J. Effects of architecture level on mechanical properties of hierarchical lattice materials. *Int J Mech Sci*. 2019;157:282-292.
15. Barbarosie C. Optimization of perforated domains through homogenization. *Struct Optim*. 1997;14(4):225-231.
16. Barbarosie C, Toader A-M. Shape and topology optimization for periodic problems. *Struct Multidiscip Optim*. 2010;40(1):393-408.

17. Barbarosie C, Toader A-M, Pre PC. Optimization of bodies with locally periodic microstructure by varying the periodicity pattern. *NHM*. 2014;9(3):433-451.
18. Li H, Luo Z, Zhang N, Gao L, Brown T. Integrated design of cellular composites using a level-set topology optimization method. *Comput Methods Appl Mech Eng*. 2016;309:453-475.
19. Li H, Luo Z, Gao L, Walker P. Topology optimization for functionally graded cellular composites with metamaterials by level sets. *Computer Methods in Applied Mechanics and Engineering*. 2018;328:340-364.
20. Wu J, Aage N, Westermann R, Sigmund O. Infill optimization for additive manufacturing-approaching bone-like porous structures. *IEEE Trans Vis Comput Graph*. 2018;24(2):1127-1140.
21. Groen JP, Wu J, Sigmund O. Homogenization-based stiffness optimization and projection of 2d coated structures with orthotropic infill. *Comput Methods Appl Mech Eng*. 2019;349:722-742.
22. J. Wu, W. Wang, and X. Gao. Design and optimization of conforming lattice structures; 2019. arXiv preprint arXiv:1905.02902.
23. Allaire G, Jouve F, Toader A-M. A level-set method for shape optimization. *Comptes Rendus Mathématique*. 2002;334(12):1125-1130.
24. Wang MY, Wang X, Guo D. A level set method for structural topology optimization. *Comput Methods Appl Mech Eng*. 2003;192(1-2):227-246.
25. Pantz O, Trabelsi K. A post-treatment of the homogenization method for shape optimization. *SIAM J Control Optim*. 2008;47(3):1380-1398.
26. Groen JP, Sigmund O. Homogenization-based topology optimization for high-resolution manufacturable micro-structures. *Int J Numer Methods Eng*. 2018;113(8):1148-1163.
27. Allaire G, Geoffroy-Donders P, Pantz O. Topology optimization of modulated and oriented periodic microstructures by the homogenization method. *Comput Math Appl*. 2019;78(7):2197-2229.
28. Geoffroy-Donders P, Allaire G, Pantz O. 3-d topology optimization of modulated and oriented periodic microstructures by the homogenization method. *J Comput Phys*. 2020;401:108994.
29. Pedersen P. On optimal orientation of orthotropic materials. *Struct Optim*. 1989;1(2):101-106.
30. Bendsoe MP, Sigmund O. *Topology Optimization: Theory, Methods, and Applications*. Berlin, Germany: Springer Science & Business Media; 2003.
31. Allaire G, Dapogny C, Delgado G, Michailidis G. Multi-phase structural optimization via a level set method. *ESAIM: Control Optim Calculus Variat*. 2014;20(2):576-611.
32. Allaire G. *Conception optimale de structures*. Vol 58. New York, NY: Springer; 2007.
33. Norris AN. Optimal orientation of anisotropic solids. *Quarter J Mech Appl Math*. 2005;59(1):29-53.
34. Simon J, Murat F. Sur le contrôle par un domaine géométrique. Publication 76015 du Laboratoire d'Analyse Numérique de l'Université Paris VI, (76015):222; 1976.
35. Allaire G, Jouve F, Toader A-M. Structural optimization using sensitivity analysis and a level-set method. *J Comput Phys*. 2004;194(1):363-393.
36. Delfour M, Zolésio J-P. *Shapes and Geometries, volume 4 of Advances in Design and Control*. Philadelphia, PA: Society for Industrial and Applied Mathematics (SIAM); 2001.
37. Delfour M, Zolésio J-P. Shape identification via metrics constructed from the oriented distance function. *Control and Cybernetics*. 2005;34(1):137.
38. Osher S, Sethian JA. Fronts propagating with curvature-dependent speed: algorithms based on hamilton-jacobi formulations. *J Comput Phys*. 1988;79(1):12-49.
39. Amstutz S, André H. A new algorithm for topology optimization using a level-set method. *J Comput Phys*. 2006;216(2):573-588.
40. Luo Z, Wang MY, Wang S, Wei P. A level set based parameterization method for structural shape and topology optimization. *Int J Numer Methods Eng*. 2008;76(1):1-26.
41. Bui C, Dapogny C, Frey P. An accurate anisotropic adaptation method for solving the level set advection equation. *Int J Numer Methods Fluids*. 2012;70(7):899-922.
42. Dapogny C, Frey P. Computation of the signed distance function to a discrete contour on adapted triangulation. *Calcolo*. 2012;49(3):193-219.
43. de Gournay F. Velocity extension for the level-set method and multiple eigenvalues in shape optimization. *SIAM J Control Optim*. 2006;45(1):343-367.
44. Burger M. A framework for the construction of level set methods for shape optimization and reconstruction. *Interfaces Free Bound*. 2003;5(3):301-329.
45. Osher S, Fedkiw R. *Level Set Methods and Dynamic Implicit Surfaces*. Vol 153. Berlin, Germany: Springer Science & Business Media; 2006.
46. Dunning PD, Kim HA. Introducing the sequential linear programming level-set method for topology optimization. *Struct Multidiscip Optim*. 2015;51(3):631-643.
47. Wang Y, Kang Z. A velocity field level set method for shape and topology optimization. *Int J Numer Methods Eng*. 2018;115(11):1315-1336.
48. Nocedal J, Wright S. *Numerical Optimization*. Springer Series in Operations Research and Financial Engineering. 2nd ed. New York, NY: Springer; 2006.
49. Hecht F. New development in freefem++. *J Numer Math*. 2012;20(3-4):251-266.
50. Allaire G, Pantz O. Structural optimization with freefem++. *Struct Multidiscip Optim*. 2006;32(3):173-181.

51. Desai J, Faure A, Michailidis G, Parry G, Estevez R. Topology optimization in acoustics and elasto-acoustics via a level-set method. *J Sound Vib.* 2018;420:73-103.