



Science Arts & Métiers (SAM)

is an open access repository that collects the work of Arts et Métiers Institute of Technology researchers and makes it freely available over the web where possible.

This is an author-deposited version published in: <https://sam.ensam.eu>
Handle ID: <http://hdl.handle.net/10985/13374>

To cite this version :

Guilhem GRIMAUD, Nicolas PERRY, Bertrand LARATTE - Sustainability Performance Evaluation for Selecting the Best Recycling Pathway During Its Design Phase - 2018

Any correspondence concerning this service should be sent to the repository

Administrator : scienceouverte@ensam.eu



Sustainability Performance Evaluation for Selecting the Best Recycling Pathway During Its Design Phase



Guilhem Grimaud, Nicolas Perry and Bertrand Laratte

Abstract As the end of life products are becoming more and more complex, the recycling systems encountered many difficulties in valuing all the materials contained in each product. This involves not only recovering a large number of materials but also doing so with the minimal environmental impact. Although the benefits of recycling are well established, the industrial processes need to be designed in regard with their environmental impacts. Therefore recyclers need robust assessment tools to make the right choices during the design of recycling processes. This approach should enable them to choose the right recycling solutions for a wide range of end of life products. In this article, we present a methodology developed for evaluating the performance of recycling processes during their design phase. This methodology is our answer to help the optimisation of the recycling of multi materials products based on the evaluation of the sustainability performance of the processes chosen.

1 Introduction

The growth of world's population and its life conditions go hand in hand with the growth of energy and raw material consumption as well as the steady growth of CO₂ concentration in the atmosphere [1, 2]. As the economy is mostly linear, the growth of consumption comes with an increase in the amount of waste produced annually [3]. In this context, the demand for primary resources is not tenable in a long-term [4, 5]. It is therefore required to find industrial solutions to maintain or improve standards of living while also decoupling resource use and demand [6].

G. Grimaud (✉)
MTB Recycling, Trept, France
e-mail: guilhem.grimaud@ensam.eu

G. Grimaud · N. Perry · B. Laratte
Arts et Métiers ParisTech, CNRS, I2M Bordeaux, F-33400 Talence, France

B. Laratte
APESA-Innovation, Talence, France

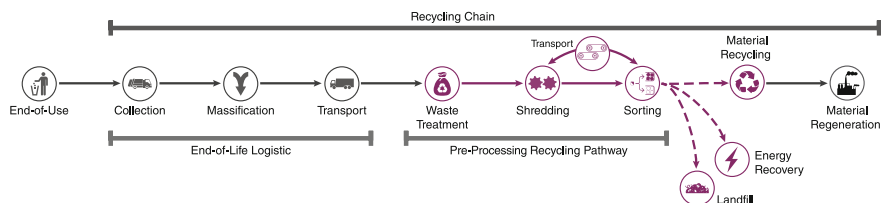


Fig. 1 Main steps of the end-of-life chain including recycling pathway

The circular economy offers a partial answer to resource depletion [7]. Recycling is inherent in the circular economy strategies making industrial companies looking for stepping recycling rates up. To do so one of the most efficient way is to implement product centric End-of-Life (EoL) strategies using closed loop recycling [8]. It shows good environmental performances but they rely on specific EoL processes. Furthermore, those EoL strategies require a suitable and efficient supply chain to reach the recycling plant. The different steps of an EoL scenario are shown on the Fig. 1. Unfortunately, the generalization of closed loop recycling is slowed down, if the associated economic balance is not favourable [9–11].

MTB company, an international manufacturer of recycling technologies and a recycling operator in France, has launched a sustainability strategy. The aim of the strategy is to reduce the environmental impact of its industrial activities. To do so, MTB started to evaluate its environmental performance with evaluation tools such as Life Cycle Assessment (LCA) and Materials Flow Analysis (MFA). The first evaluation has been realised on an aluminium recycling process using only mechanical separation process instead of smelting. Results show the advantages of mechanical processes [12]. Based on these results from environmental evaluations, MTB implemented corrective measures to increase its environmental performance level [13]. Beyond optimizing recycling pathways in operation, these results also helped us to guide the research for new recycling processes which have been designed to be more sustainable [14]. All these steps help to enrich the company's own knowledge, but the evaluation process is long and requires strong stakeholder involvement at each assessment step.

In order to make this new practice more systematic and provide relevant data to decision makers, a methodology was needed to integrate the Life Cycle Management (LCM) approach during the design phase. The technologies used for pre-recycling processes are multiple and it is important to determine the best combination according to different categories of indicators and not only financial performance. The purpose of our work is to provide the engineering team with the results of the environmental evaluation during the design phase. Based on this information, the engineering team will be able to select the best recycling pathway. This method is intended more specifically to assess waste that are not recycled so far.

The construction of our approach has been broken up into several key stages. First, the evaluation tools (LCA, MFA) were used to characterize technologies and to identify the key impact category indicators. Next, the Environmental Technology

Verification (ETV) was used to draw the evaluation framework for recycling pathway. Then, the final stage was the implementation of a decision-making tool for the engineering team. In this article, we present the interlinking of tools to conduct an evaluation during the design phase of recycling processes.

2 Methodological Framework

2.1 Segmentation of Recycling Processes

The recycling pathways are mostly based on common elementary technologies. The elementary technology selection and order have a strong influence on the overall performance of the recycling chain [15]. This assembly achieves the targets of purity and quality specific to processed waste. The performances largely depend on the pathway rather than technological innovations [16], hence, the assembly choices of common sub-processes are one of the key points to design efficient recycling pathways. The Fig. 2 shows EoL's pathway alternatives for the same waste. The technologies used and the streams vary with recycling process choices. We have determined that recycling processes can be classified in three types [17]: shredding, separation and transport. In addition to these three families of process unit, there is the flow unit family.

2.2 Unit Process Database

To support the evaluation, we launched the construction of a database for recycling processes. This database includes technical, environmental and economic datasets. On the one hand, for each data a part of the values is fixed. They are invariant data regardless the type of transformation performed by the unit process. This is mainly the impact of manufacturing, its price without the options or the weight of the

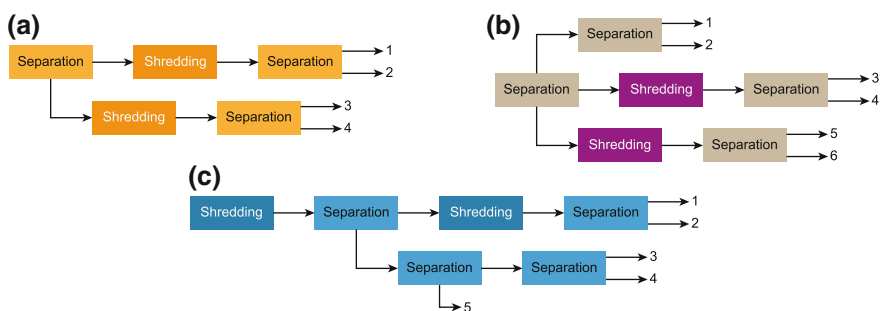


Fig. 2 Presentation of different pathways for the same waste

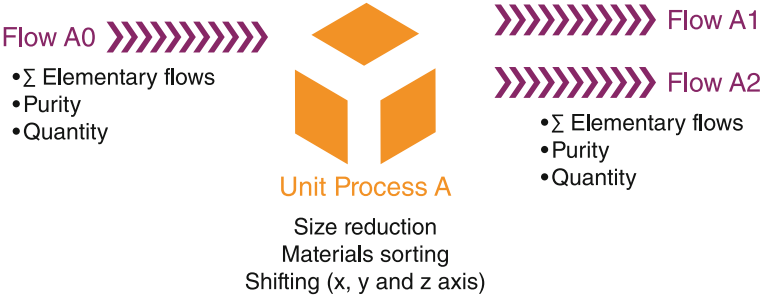


Fig. 3 Modeling of a recycling pathway step with a separation unit process

equipment. On the other hand, in addition to these fixed values, the engineering team define values to adjust the unit process to the specificities of the customer needs. These are the operating variables. These actions will have a direct effect on the performance of the recycling pathway. Each unit process and its associate in/output flows can be modelled as shown on the Fig. 3.

In order to define the technical characterization of each unit process, we have chosen to implement the Environmental Technology Verification (ETV) protocol [18, 19]. The main steps of the ETV program are given on Fig. 4. The whole ETV verification steps combine together take eight to eighteen months to be performed [20]. In comparison, the average designing time for a recycling pathway is between three and six months. Although ETV’s verification time is too long for designers, the program provided general requirements, allowing to develop a self-assessment framework [21].

For the three families of unit process, the Table 1 gives the associate operational details and the technical characterization defined using the ETV program. For each specific unit process, technical characterization will help to define the most suitable process for each purpose of the recycling pathway step.

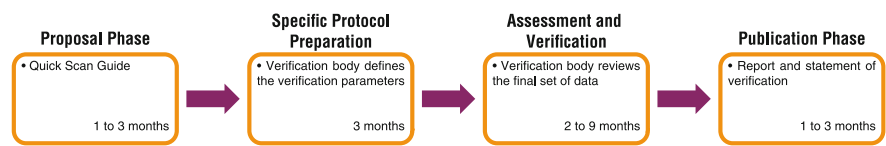


Fig. 4 Main steps of the European environmental technology verification process

Table 1 Variables and characterization for recycling each unit process family

Type	Operational details	Characterization
Shredding	Type of technology (constraint) Cost of purchase Material losses Capacity	Reduction rate/fineness
Separation	Type of technology (constraint) Cost of purchase Material losses Capacity	Effectiveness/separation quality
Transport	Type of technology (constraint) Environmental characterization Cost of purchase Material losses Capacity	Rate flow
Elementary flow	Composition flow Physical properties Input or output Market price	Purity

3 Results

3.1 Step by Step Evaluation Methodology

Our assessment methodology has been developed to provide a coarse result in early design phases and to promote sustainable solutions. The methodology can be divided into several key steps. First, the general framework is built based on the customer needs and with the waste type specifications. This step allows to determine the specific constraints, delays and costs of the project in order to determine the initial specifications for the recycling pathway. In the continuity, the customer provides its main orientations for the recycling process purpose. The customer defines the purpose and objectives for the recycling pathway. Next, the engineering team validate or not the main orientation of the recycling chain. From this orientation, the engineering team starts working on the recycling pathway proposal. The aim is to provide treatment synoptic definition, selection of the main steps and the choice of technological bricks.

According to the recycling chain synoptic, for each step of the recycling pathway, MTB’s Sales Team needs to select the appropriate technology and thanks to the expertise from MTB’s Engineering Team the operating variables are selected. It is from this point that the database makes it possible to calculate the unit performances. This calculation is made according to the general settings, the specific information flow and the variables. At the end, a synthetic evaluation of the global process and unit steps is provided to allow discussion.

3.2 Unit Process Performance Calculation

3.2.1 Technical Performances

The technical performance indicators are oriented towards the capacity of the pathway to recycle the waste, so each unit process is described by three indicators.

- Recycling rate
- Recovery rate
- Landfill rate

The calculation of these rates is made according to the standard [22].

3.2.2 Economic Performances

For the economic dataset, data is easily accessible through the information provided by manufacturers and recyclers feedback. The Life Cycle Cost (LCC) analysis is used to determine the economic performance of each unit process. The LCC methodology used to consider both the costs of each system in addition to the profit from the sales of the sorted materials. However we do not include the costs of the environmental impact [23]. The economic performance is described by using three results:

- Initial investment costs
- Operating costs (cost per ton)
- Profit from recycled materials sales

3.2.3 Environmental Performances

Inventory data characterising recycling processes are rare and usually not available in the most currently used generic Life Cycle Inventory database (ELCD, Gabi, Ecoinvent). Specific inventory data remain to be collected and assessed to build reliable and representative datasets. Our team has started to build an environmental database for recycling processes. The results of environmental performance assessment are given through one inventory indicator and two environmental impacts indicators (using ILCD methodology [24]):

- Total energy consumption
- Climate change
- Non-renewable resource depletion

4 Discussion

The decision tool aims to help the design team to implement more sustainable recycling pathway. It is not a matter of providing a comprehensive assessment for each recycling pathway during the design phase, but it is to communicate to industrial customers the performance indicators in addition to the economic indicators. These additional performance indicators should allow designers to propose optimization on recycling pathways and give a quantified result of the improvements. With an iterative approach, designers could optimize the flows and processes to contain impacts.

Although recycling process lines are not new, industrial optimization has not been fully conducted yet [25]. The unconstructive approach, the complexity of waste and the lack of control over incoming flows limit the drafting of theoretical principles. The increasing interest in waste recycling and the evolving regulations in force steer the waste sector to adopt an increasingly industrial approach. In order to support this transition, it is a question of advancing the design methods with specific tools.

5 Conclusion

Even though plenty of technical options exist for developing recycling products, the recycling solutions selecting motivations are too often led by the pursuit of profit growth which leads to a greater inefficiency [26]. By communicating additional performance indicators, we are convinced that this approach can evolve. And that new issues will be introduced in trade negotiations for recycling pathway.

As a next step, we need to build a sufficiently complete and robust database to support the evaluation of recycling pathway. This approach must be enriched in the future. It is also required to facilitate the improvement of the quality of results during the refining process variables and input parameters.

Acknowledgements The authors want to thank MTB Recycling and the French National Association for Technical Research (ANRT) for the funding of the Ph.D. study (CIFRE Convention N° 2015/0226) of the first author.

References

1. Stocker T.F, Qin D, Plattner G.K, Tignor M.M.B, Allen S.K, Boschung J, et al., Climate change 2013: the physical science basis, Intergovernmental Panel on Climate Change, Cambridge, 2013.
2. Yao C, Feng K, Hubacek K, Driving forces of CO₂ emissions in the G20 countries: An index decomposition analysis from 1971 to 2010, Ecol. Inform. 26 (2015) 93–100. <https://doi.org/10.1016/j.ecoinf.2014.02.003>.

3. EUROSTAT, Statistics on Waste in Europe, Stat. Explain. (2015). <http://ec.europa.eu/eurostat/statistics-explained/index.php/Waste_statistics/fr> (accessed April 3, 2016).
4. Miehe R, Schneider R, Baaij F, Bauernhansl T, Criticality of Material Resources in Industrial Enterprises—Structural Basics of an Operational Model, 23rd CIRP Conf. Life Cycle Eng. 48 (2016) 1–9. <https://doi.org/10.1016/j.procir.2016.03.035>.
5. Hametner M, Dimitrova A, Schindler P, Sustainable development in the European Union—2016 Edition, EUROSTAT, Brussels, 2016, doi:10.1002/ (SICI)1099-0976 (199711) 7:6 <181::AID-EET134> 3.0.CO; 2-S.
6. Schandl H, Decoupling global environmental pressure and economic growth: scenarios for energy use, materials use and carbon emissions, J. Clean. Prod. (2015) 1–12. <https://doi.org/10.1016/j.jclepro.2015.06.100>.
7. McDonough W, Braungart M, Cradle to cradle: Remaking the Way We Make Things, Edition al, Manifesto, Paris, 2012.
8. Rebitzer G, Fullana P, Weidema B.P, Joliet O, Recycling, Close-Loop Economy, Secondary Resources, in: 10th LCA Case Study Symp., 2003: pp. 106–108.
9. Butterworth J, Morlet A, Nguyen H.P, Oppenheim J, Stuchtey M, Towards the Circular Economy: Economic and Business Rationale for an Accelerated Transition, Ellen MacArthur Foundation, Vol. 1, 2013 98. <https://doi.org/10.1162/108819806775545321>.
10. Gahleitner A, Closing the loop: Next steps critical for Europe's Circular Economy, Eur. Alum. Assoc. 2, 2015, 2.
11. Lavery G, Pennell N, Le Nouveau Modèle Industriel : Plus de bénéfices, plus d'emplois et moins d'impact sur l'environnement, Interface, 2014.
12. Grimaud G, Perry N, Laratte B, Life Cycle Assessment of Aluminium Recycling Process: Case of Shredder Cables, in: Procedia CIRP, Berlin, 2016. <https://doi.org/10.1016/j.procir.2016.03.097>.
13. Grimaud G, Perry N, Laratte B, Reducing Environmental Impacts of Aluminium Recycling Process Using Life Cycle Assessment, 12th Bienn. Int. Conf. EcoBalance. October, 2016, 7. <https://doi.org/10.1016/j.procir.2016.03.097>.
14. Grimaud G, Laratte B, Perry N, To Transport Waste or Transport Recycling Plant: Insights from Life-Cycle Analysis, in: Soc. Mater. Int. Conf. (SAM 11), SOVAMAT, Trondheim, 2017: pp. 1–18.
15. UNEP, Recycling Rates of Metals, Paris, 2011.
16. Fisher A, Functional versus Innovative Products, 2012, 8.
17. Heiskanen K, Theory and Tools of Physical Separation/Recycling, in: Handb. Recycl., Elsevier Inc., Amsterdam, 2014: pp. 39–61. <https://doi.org/10.1016/b978-0-12-396459-5.00005-2>.
18. European Commission, General Verification Protocol for EU Environmental Technology Verification programme—Version 1.1, 2014, 74.
19. European Commission, EU Environmental Technology Verification, Environ. Technol. Verif. Progr., 2016, 15. <<http://ec.europa.eu/environment/etv/>> (accessed July 13, 2016).
20. European Commission, A Comprehensive Guide for Proposers to the EU Environmental Technologies Verification Pilot Programme, Project Ad, European Commission, Luxembourg, 2012.
21. Grimaud G, Perry N, Laratte B, Decision Support Methodology for Designing Sustainable Recycling Process Based on ETV Standards, Int. Conf. Sustain. Mater. Process. Manuf. SMPM 2017. 7, 2017, 72–78. doi:<http://dx.doi.org/10.1016/j.promfg.2016.12.020>.
22. International Standard Organization, ISO 22628:2002—Road vehicles—Recyclability and recoverability—Calculation method, 2002. <<https://www.iso.org/standard/35061.html>> (accessed May 31, 2017).
23. Office of Acquisition and Project Management, LIFE CYCLE COST HANDBOOK Guidance for Life Cycle Cost Estimation and Analysis, 2014, 89. http://energy.gov/sites/prod/files/2014/10/f18/LCC_Handbook_Final_Version_9-30-14.pdf.

24. JRC, European Commission—Institute for Environment and Sustainability, Characterization factors of the ILCD Recommended Life Cycle Impact Assessment methods—EUR 25167, Brussels, 2012. <https://doi.org/10.2788/60825>.
25. Martínez Leal J, Charbuillet C, Pompidou S, Perry N, Recycling Chains: A proposal for an Exhaustive Definition, 10th Int. Conf. Soc. Mater., Roma, 2016: p. 21.
26. Allwood J.M, Ashby M.F, Gutowski T.G, Worrell E, Material efficiency: A white paper, Resour. Conserv. Recycl., 55, 2011, 362–381. <https://doi.org/10.1016/j.resconrec.2010.11.002>.

Open Access This chapter is licensed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license and indicate if changes were made.

The images or other third party material in this chapter are included in the chapter's Creative Commons license, unless indicated otherwise in a credit line to the material. If material is not included in the chapter's Creative Commons license and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder.

