



Science Arts & Métiers (SAM)

is an open access repository that collects the work of Arts et Métiers Institute of Technology researchers and makes it freely available over the web where possible.

This is an author-deposited version published in: <https://sam.ensam.eu>
Handle ID: <http://hdl.handle.net/10985/17277>

To cite this version :

Liaqat Ali SHAH, François VERNADAT, Ali SIADAT, Alain ETIENNE - Performance Visualization in Industrial Systems for Informed Decision Making - IFAC-PapersOnLine - Vol. 51, n°11, p.552-557 - 2018

Any correspondence concerning this service should be sent to the repository

Administrator : scienceouverte@ensam.eu



Performance Visualization in Industrial Systems for Informed Decision Making

L.A. Shah*, A. Etienne**, A. Siadat** F.B. Vernadat***

* COMSATS Institute of Information Technology, Park Road Islamabad, Pakistan (liaqat.shah@comsats.edu.pk)

** LCFC, Arts et Métiers ParisTech, Centre de Metz, F-57070 Metz, France (@ensam.eu)

*** LGIPM, University of Metz, BP 45112, F-57073 Metz cedex 3, France (vernadat30@gmail.com)

Abstract: Information visualization is a key component of many decision support tools in sciences and engineering. Graph is a visual construct that is widely used to model information for visualization. In this paper, a value-risk graph is proposed to visualize the results of value-risk based performance measurement systems (PMSs). The proposed graph for PMS divides the overall performance of industrial systems into distinct zones to facilitate the decision-making process. The upper bound, lower bound, and target value of each measure are decided by the performance evaluator and, then, transformed into normalized values using value theory principles. The aggregation of normalized measures along value and risk lines when combined defines “highly desirable”, “feasible”, “risky”, and “unacceptable” zones. Scenario performance data when plotted on the graph visualize the overall performance of the system in terms of value and risk. The proposed decision-making value-risk graph is illustrated with an example dealing with manufacturing process design but it can be applied to any kind of system evaluation.

Keywords: Information Visualization, Value, Risk measures, Performance Measurement Systems, Decision Support

1. INTRODUCTION

The last three decades have witnessed considerable development in the field of performance measurement and management. Models, frameworks, and methodologies have been developed to effectively measure the performance of organizations (Bititci *et al.* 2011; Cocca and Alberti, 2010; Kaplan and Norton, 1996). Their use was not limited to a particular discipline but employed across different disciplines such as manufacturing (Berrah and Clivillé, 2007; Vernadat *et al.*, 2013), civil engineering (Bassioni *et al.*, 2004; Kagioglou *et al.*, 2001), healthcare (Shankar Purbey *et al.*, 2007), public sector (Van Dooren *et al.*, 2015), and others.

This wide spectrum demonstrates the interest in performance measurement systems (PMSs). However, many surveys point out the disappointment of organizations with their PMSs (Fletcher and Williams, 2016; Unit, 1994). There is still a feeling among academics and practitioners that the potential of PMSs is rarely exploited. Bourne *et al.* (2005) conducted a survey regarding the use of PMSs in the private sector. Conversely to prevailing belief, they found that PMSs are not yet widespread. From their conclusion, KPIs are by far the most commonly used measurement tools in the industry. A KPMG (2001) survey reported that the most common disappointment with regard to PMSs is the lack of data integrity and their inability to produce meaningful information to support decision making. The report then identifies better information quality and communication as a potential area for improvement. The issue of communication and comprehension of performance measures throughout the organization is often reported in the literature (Aki Jääskeläinen and Sillanpää, 2013; Wade and Recardo, 2009).

To tackle the issue of performance measure communication and comprehension, visualization techniques can play a significant role. Visualization is a powerful tool to present

elegantly multifaceted measures and to facilitate the decision-making process. Visualization refers to both visual or graphical representation and the cognitive process of understanding an image (Mazza, 2009). In performance management and decision contexts, visualization is about the representation of performance related data, information, concepts, and knowledge in a graphical way to gain insights to make easier decision-making processes. Suitable visualization can simplify complexity of the perception process, accelerate perception and, thus, achieve a cognitive relief (Adamantios, 2012). Moreover, the visualization process can be applied to improve understanding over large data sets without complex quantitative methods (Aki-Jääskeläinen and Juho-Matias, 2016).

Despite clear potential, the use of visualization methods in management is still limited (Al-Kassab *et al.*, 2014). Although, it is gaining increasing attention in the field of performance measurement, the topic is still quite ambiguous and new in this field. Visualization is usually perceived as synonymous to dashboards. Much of the research in the field is focused on presentation formats of dashboards devised for balanced scorecards (BSC). For instance, Cardinaels and van Veen-Dirks (2010) investigated the various effects of tabular data in BSC on managerial evaluation. Banker *et al.* (2011) analyzed the influence of presenting graphical information in BSC on evaluators' decision quality and concluded that the graph did influence evaluators' decision as predicted. Moreover, the addition of graph with tabular data increases the accuracy of performance evaluation (Kagioglou *et al.*, 2001). However, little effort is made so far to reduce the cognitive burden of performance evaluators by reducing the display measures without sacrificing the dimensions of performance. So, many measures on display will definitely require more cognitive effort to synthesize performance information.

The aim of this paper is to simplify performance evaluation and presentation by aggregating the measures along value and risk lines in the first place and, then, to propose a value-risk graph for the purpose of performance visualization. To develop the indicators and the value-risk graph, the paper relies on the standard information visualization process.

2. INFORMATION VISUALIZATION PROCESS IN PMSs

The process of information visualization (Al-Kassab *et al.*, 2014) can be segmented into: (a) raw data collection; (b) data transformation; (c) data warehousing; and (d) visual transformation (Fig. 1).



Fig. 1. Information visualization process

This visualization process is used as a framework in the paper to guide performance indicators and value-risk graph development. The graph acts as a tool for performance display of the industrial system to meet the managerial requirement. Moreover, tools, methods, and techniques in each segment of Fig. 1 are identified and employed to support the performance indicator development in the visualization process. The following sub-sections briefly explain the segments of the process.

2.1 Raw Data Collection

First, raw data about a system or process need to be collected. In the PMS context, raw data refer to variables or parameters of interest within the system under study. For instance, in manufacturing and supply chain settings, the parameters of interest and to be measured can be “number of orders dispatched” or “number of orders fulfilled”. However, they are variables and not performance measures per se, because they do not communicate any performance information unless they are placed in a business context. By combining the two variables in a ratio form, a performance measure of “perfect order fulfilment” can be developed.

To collect data for performance measurement, two methods can be employed: ECOGRAI (Doumeings *et al.*, 1995) and value focused thinking (VFT) (Keeney, 1996). The former method uses the triplet objective-variable-performance indicator and searches variables on which the decision maker can act to reach their objectives as well as performance indicators that measure the efficiency of the objectives attainment process. The VFT method, on the other hand, is an objective-driven performance measure determination and evaluation process, which uses value theory to compute the value of a system. In the current study, the VFT approach is used to model objectives and risks of the system.

Objective modeling: By definition, value is the degree of satisfaction and fulfilment of stakeholders’ objectives. Data regarding value are identified by means of the VFT technique. VFT identifies objectives O_i ($i = 1, \dots, n$) suitable for the process considered and defines measures M_j ($j = 1, \dots, m$) in-line with the objectives. For instance, in a supply

chain context, a high level objective can be “To satisfy customer order”. The lower level objectives are identified next by asking a simple question “*What do you mean by that?*”. For example, the customer order satisfaction means “on-time delivery”, “minimum cost”, and “high quality”. This process of objective decomposition continues until the upper level objective cannot be further decomposed. The identified objectives are then organized in a hierarchical form (Fig. 2).

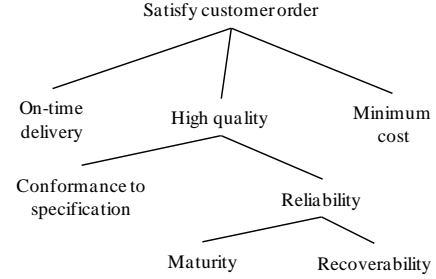


Fig. 2. Objective hierarchy

The sub-objectives on the lowest level of the hierarchical structure are quantifiable and, hence, performance measures (or criteria) can be defined for each of them. For instance, for the refined objectives of maturity and recoverability, “the number of process errors occurred” and the MTBF (Mean Time between Failures) can be defined as performance measures, respectively. In the same manner, measures of interest are identified and listed as raw data of the visualization process.

Risk modeling: Similar to objective modeling, risk modeling starts by identifying a global risk which is the opposite of a global objective. For instance, if the global objective of a process is to satisfy customer orders, then the corresponding global risk would be: “failure to satisfy customer order”. The global risk is refined and then arranged in the form of a risk hierarchy as shown by Fig. 3.

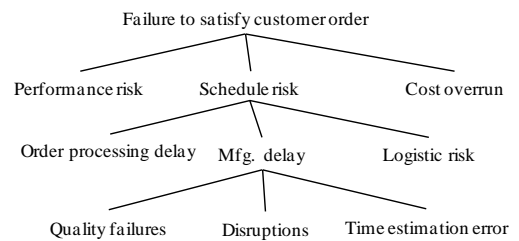


Fig. 3. Risk event hierarchy

Once the risks of the system have been identified, they are then analyzed with the failure mode, effect, and criticality analysis (FMECA) method as shown in Table 1.

Table 1: Excerpt of FMECA process for “Schedule risk”

Process	Fail. mode	Causes	Effects	P	C	D	RPN
Activity i	Duration estimation error	Process - novelty - complexity	Uncertain Lead time	5	7	6	210

The critical risks in terms of RPN in the FMECA table are then considered for further processing and low RPN risks are eliminated from the visualization process.

In short, the outcome of this segment of the performance visualization process is a list of performance and risk measures needed to compute the value created and the extent to which it is exposed.

2.2 Data Transformation

By data transformation, we mean the normalization of performance measures into commensurate performance expressions. Performance measures are heterogeneous in nature due to the multidimensionality of the performance concept and it is often hard for an evaluator to reach a logical conclusion. For instance, metrics such as “order fill rate”, “order cycle time”, “on-time delivery”, “cost per order”, “productivity”, and “system utilization” are measured in different units because they refer to different dimensions of a manufacturing system performance. The list can be more exhaustive if more aspects of the system are considered. A Skandia IC report (Tan *et al.*, 2008) uses 112 performance metrics to measure five areas of focus including financial, customer, process, renewal, and development as well as human resources. Making a decision based on so many measures is beyond the cognitive capacity of human agents.

To remedy this situation, one way is to normalize the measures using multi-attribute value theory (MAVT). The MAVT is a structured methodology to handle trade-off among multiple objectives (and thus performance measures/criteria) and to assign a utility value to each measure by rescaling them onto a 0-1 scale, where “0” represents the worst preference and “1” represents the best one. This transformation (mapping) of physical measure onto a [0, 1] scale is also known as value elicitation process and can be performed as follows (Berrah *et al.*, 2008).

$$P: O \times M \rightarrow E$$

$$(o, m) \rightarrow P(o, m) = P$$

where O , M and E represent universes of discourse, respectively of the set of objectives o , of the set of measures m and of the performance expressions P .

To obtain the performance expressions P , two finite sets $M = \{m_1, m_2 \dots m_n\}$ and $A = \{a_1, a_2 \dots a_n\}$, representing measures and alternatives respectively, are considered. Then, $a \in A$ and $m \in M$ can be associated with a profile $p_i^a = (p_{m_1}^a, p_{m_2}^a \dots p_{m_n}^a)$ where p_i^a represents a partial score of measure i (performance/risk expression) in alternative a on a [0, 1] scale. This partial score determination can be carried out using the MACBETH methodology. Details of the methodology for the value elicitation process can be found in the literature (Cliville *et al.*, 2007; Shah, 2012).

2.3 Data Warehousing

One of the objectives of a PMS is to provide comprehensive and timely information on the performance of a process/system. To this end, data and information related to performance measurement and measures need to be centrally stored in a database; to be made accessible by different

stakeholders of the system such as analysts or departmental managers either for decision making or performance improvement initiatives (Kuong *et al.*, 2001). In this paper, data warehouse refers simply to a collection of performance and risk expressions of the performance and risk measures identified in the raw data collection phase of the process. The expressions are structured in a tabular form and easily made accessible to evaluators for the purpose of decision making. The authors don't apply any data modeling tool such as entity diagrams or UML classes to model the performance data.

2.4 Visual Transformation

Visuals are commonly used in lean manufacturing to visualize workflows, performance results, and opportunities for improvement. For this purpose, scoreboards are developed where key performance indicators are communicated in real time. However, one scorecard for individual performance measure requires space to present performance data and effort to make a decision based on scorecards. They are imperative at operational level. However, at the tactical and strategic levels, one needs a graph or two to encompass the whole performance visualization of the system. This is only possible if the unit performance expressions have been aggregated.

Aggregation: The aggregation is formalized by the following mapping (Berrah *et al.*, 2008).

$$Ag: E_1 \times E_2 \times \dots \times E_n \rightarrow E$$

$$(P_{m_1}, P_{m_2}, \dots, P_{m_n}) \rightarrow P_{overall} = Ag(P_{m_1}, P_{m_2}, \dots, P_{m_n})$$

E_i is the universe of discourse of the performance expressions (P_1, P_2, \dots, P_n) and E denotes the aggregated (Ag) performance.

In our case, the aggregated function Ag in the above mapping is a 2-additive Choquet Integral (CI) (Grabisch and Labreuche, 2008). Mathematically,

$$C_u(x) = \sum_{i=1}^n v_i p_i - \frac{1}{2} \sum_{i=1}^n I_{ij} |p_i - p_j| \quad (1)$$

where C_u models vectors of performance expressions p_i , v_i denotes a Shapley index that represents importance of expression v_i relative to all other expressions (with $\sum_{i=1}^n v_i = 1$), and I_{ij} is the interaction between expressions (x_i, x_j) , ranging in [-1, 1].

Construction of the Value-Risk Graph: By computing the global value and risk indicators, it is now convenient to develop a two dimensional value-risk graph in the range of [0, 1] on the x-axis and y-axis.

To this end, the x-axis is divided into the three following ranges: *Value indifference*- It refers to the range of values which are not significant and for which the company will avoid pursuing the process; *Value tolerance/acceptable*- This range remains between the upper bound of value indifference, until the point where the value starts becoming desirable. In this range, the company may pursue the process; and *Value desirable*- Beyond the acceptable range is the desirable range, i.e., the company is willing to pursue the process. These ranges are drawn on the x-axis line as shown in Fig. 4.




Fig. 4. Ranges of values on the x-axis

In a similar way, the y-axis is divided into: *Risk appetite*- It refers to the risk an organization is willing to accept in the pursuit of process objectives; *Risk tolerance*- It specifies the maximum risk that the organization is willing to take in the pursuit of the process objectives; and *Risk intolerance*- It corresponds to the risk level not acceptable. The ranges have been drawn on Fig. 5




Fig. 5. Range of risks on the y-axis

In addition, it is proposed to develop a value-to-risk curve to model the acceptability of a process when the value progresses with regard to risk. In reality, organizations may take risk beyond the risk tolerance in pursuit of value creation for their stakeholders. For this purpose, a value/risk ratio can be defined that will be restricted within a minimum acceptable value and a point of risk beyond which an organization cannot afford to pursue its objectives in any respect. The aim of the value/risk ratio is to determine the upper bound for the acceptability of a process in pursuit of objectives fulfillment. However, its determination is still subjective and depends on the company's attitude towards pursuing its objectives (value creation) and risk taking.

By defining the ranges for measures and value/risk ratio, a Value-Risk Graph is developed as illustrated in Fig. 6. To determine the value and risk ranges quantitatively, a target, lower and upper bounds for each performance, and risk measure are defined. For instance, a process cost in the range of 10, 12, and 16 units will have a lower bound of 10, a target of 12 and an upper bound of 16 units, respectively. In this context, the lower bound is the ideal scenario while the upper bound is the worst case. Once the ranges for each measure have been defined, they are then normalized in the range of [0, 1] using the value elicitation technique and aggregated to obtain global indicators (Shah 2012).

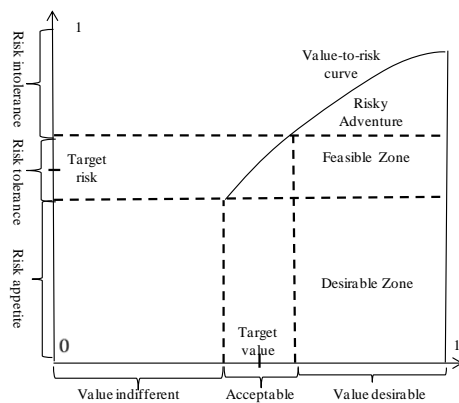


Fig. 6. Value-Risk Graph for decision-making

3. APPLICATION

To illustrate the process of performance visualization in a manufacturing company, a manufacturing case study is presented. The company designs and fabricates products on make-to-order (MTO) basis. The reference product for this case study is a mechanical locator (cf. Fig. 7), *i.e.*, a work holding device used for centering a part on a machine-tool.

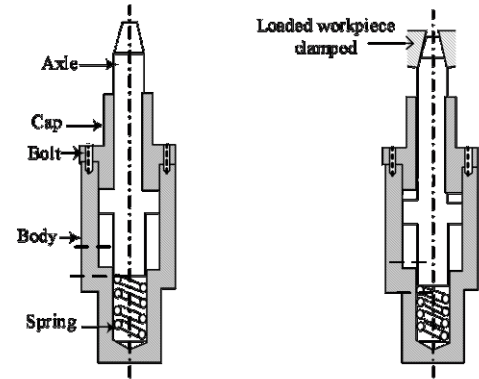


Fig. 7. Mechanical locator

To illustrate the use of the proposed visualization process within the company, a manufacturing scenario is defined.

3.1 Case study: Manufacturing Scenario

The company under study receives an order for 200 high quality mechanical locators from a customer with a lead time of two weeks (10 working days). The price of the product is kept at \$14 per unit. The technical performance of the product is measured in terms of satisfaction index (q). Moreover, the company has sufficient resources at its disposal, therefore part axes, bodies, and caps are machined at the facility while springs and bolts are purchased from the market. We assume that all raw materials and the purchased parts are available whenever needed. Failing to satisfy the customer order will cause penalty cost. A product having satisfaction index below 0.8 is rejected. In case of delay after the tolerance period (2 days), the company has to pay \$2/unit time tardiness up to 5 working days for each product; beyond this period, the order is cancelled and backlog cost of \$10 per unit is paid.

3.2 Application of the process to the mfg. scenario

Let us apply the proposed visualization process to this scenario. First of all, raw data regarding performance and risk measures are obtained using the objective and risk models (cf. Fig. 2 and Fig. 3). The objective model is used to derive the performance measures: manufacturing cycle time (C_1), manufacturing total cost (C_2), technical performance (C_3), and employee satisfaction (C_4). From the risk model, major risk events relevant to time, cost, and quality dimensions that correspond to schedule risk (R_1), cost overrun (R_2), and performance risk (R_3), respectively, are identified.

Before carrying out the normalization step, an upper bound (UB), lower bound (LB), and target score for each measure must be determined to define the ranges for desirability, acceptability, and indifference for the value axis as well as risk appetite, risk tolerance, and risk intolerance for the risk

axis (cf. Table 2). For the cost and time objectives, the lowest limit is the desirable one while for the measures of employee satisfaction and technical performance, the upper limit is desired. In the case of risk measures, the lower limit is always preferred.

Table 2: Bounds and target on measures

	C_1	C_2	C_3	C_4	R_1	R_2	R_3
UB	24	18	100	100	4	5	1
Target	20	14	80	75	2	2	0.3
LB	18	12	75	60	1	1	0.2

Values of the measures (Table 2) are transformed into normalized measures (also called expressions) via the MACBETH method, where the upper and lower bounds provide the good and neutral reference points in the value elicitation process. For details, see Shah (2012). The outputs of the MACBETH tool are the following expressions for the measures: $C_1=0.33$, $C_2=0.4$, $C_3=0.43$, $C_4=0.48$, $R_1=0.57$, $R_2=0.67$, and $R_3=0.55$. Next, Shapley indices v_i and the interaction parameters I_{ij} are determined as presented in Table 5 (For details, see Shah, 2012; Clivillé *et al.*, 2007). The expressions and the identified parameters v_i and I_{ij} are put in Equation (1) to obtain a global score for both value and risk.

- Minimum acceptable global value = 0.39
- Maximum acceptable global risk = 0.59

These values will be used as points of reference (cf. Fig. 8) to appraise the actual scenario understudy.

Now, in the real scenario, three process plans for the mechanical locator are generated and evaluated in the simulation environment against the performance measures. The results of the simulation experiments are obtained and tabulated in Table 3.

Table 3: Simulation results for three process plan models

	C_1	C_2	C_3	C_4	R_1	R_2	R_3
PP1	20.5	16.6	0.87	0.94	0.715	5.57	3.96
PP2	20.4	13.8	0.90	0.91	0.28	2.46	4.12
PP3	22.4	12.4	0.78	0.74	3.6	0.415	3.94

To obtain the value and risk expressions with MACBETH, the process plans are ranked on the basis of desirability and strengths of preference for each criterion are provided as follows:

$C_1 \Rightarrow \text{Good} >^1 \text{PP2} >^2 \text{PP1} >^4 \text{PP3} >^1 \text{Neutral}$

$C_2 \Rightarrow \text{Good} >^2 \text{PP3} >^1 \text{PP2} >^2 \text{PP1} >^1 \text{Neutral}$

$C_3 \Rightarrow \text{Good} >^1 \text{PP2} >^1 \text{PP1} >^2 \text{PP3} >^3 \text{Neutral}$

$C_4 \Rightarrow \text{Good} >^0 \text{PP3} >^4 \text{PP2} >^1 \text{PP1} >^1 \text{Neutral}$

In the same way, information is provided on alternatives for each risk measure. This ordinal preference modeling is then

transformed into normalized value and risk expressions with MACBETH and presented in Table 4.

To consolidate the expressions, the Shapley indices v_i and the interaction parameters I_{ij} have already been determined in the calculation of global minimum value and maximum risk and presented in Table 5.

Table 4: Value and risk expressions for the mfg. scenario

	x_1	x_2	x_3	x_4	r_1	r_2	r_3
PP1	0.63	0.1	0.5	0.14	0.12	0.98	0.66
PP2	0.83	0.5	0.6	0.20	0.38	0.57	0.78
PP3	0.18	0.7	0.11	1.0	0.88	0.14	0.56

The 2-additive Choquet integral model (cf. Equation 1) is then employed to aggregate the value and risk expressions as tabulated in Table 5.

Table 5: Value and risk indicators for the mfg. scenario

	x_1	x_2	x_3	x_4	\mathcal{V}	r_1	r_2	r_3	\mathcal{R}
PP1	0.1	0.63	0.5	0.14	0.45	0.98	0.66	0.12	0.53
PP2	0.5	0.83	0.6	0.20	0.31	0.57	0.78	0.38	0.59
PP3	0.7	0.18	0.11	1.0	0.16	0.14	0.56	0.88	0.56
v_i	0.26	0.24	0.30	0.18		0.34	0.18	0.48	
I_{ij}	I_{12}	I_{13}	I_{14}	I_{23}		I_{12}	0.090		
	0.21	0.21	0.11	0.2		I_{13}	0.13		
	I_{24}	I_{34}				I_{23}	0.090		
	0.15'	0.158							

The interaction, for example, between C_1 and C_4 , i.e. I_{14} , indicates that mfg. time and employee satisfaction positively affect each other; however, their interaction is minimal. For the index, i.e. v_i , technical performance carries more weight (0.3) followed by mfg. time (0.26) while employee satisfaction is the least important of all (0.18) in the Value category. The aggregated scores for the process plans are plotted on the Value-Risk Graph as shown in Fig. 8.

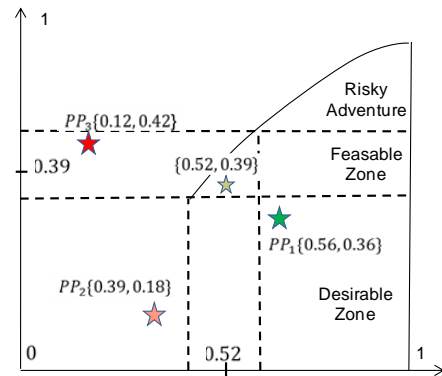


Fig. 8. Value Risk Graph for the manufacturing scenario

From the Value-Risk Graph, it is clear that only process plan PP1 falls in the desirable region for the scenario understudy. Therefore, the process plan PP1 is chosen to manufacture the product, while the scenarios PP2 and PP3 are dropped.

4. CONCLUSIONS AND FUTURE WORK

The work reported in the paper addresses performance visualization and identifies the tools and techniques of the decision theory to be used for each phase of the process to develop global value and risk indicators. Based on the global indicators, the Value-Risk Graph is constructed that defines zones representing “highly desirable”, “feasible”, “risky”, and “unacceptable” situations to make the decision-making process easier and clearly visible.

Future work should include the extension of the current *Value* and *Risk* approach by adding the *Cost* dimension to the existing Value-Risk Graph. To develop the global cost indicator, the same approach will be employed, and the cost dimension, then, will be added to the graph along z-axis making a cubic graph in order to provide all the essential elements for a robust and informed decision-making as requested by the BCVR (Benefit-Cost-Value-Risk) Methodology (Li *et al.*, 2017), which is partly based on this work.

REFERENCES

- Adamantios, K. (2012). *Management Information Systems for Enterprise Applications: Business Issues, Research and Solutions*. IGI Global.
- Aki-Jääskeläinen., Juho-Matias R. (2016). Visualization techniques supporting performance measurement system development. *Measuring Business Excellence* 20, 13–25.
- Aki-Jääskeläinen, Virpi S. (2013). Overcoming challenges in the implementation of performance measurement: Case studies in public welfare services. *Int. J. Public Sector Management* 26, 440–454.
- Al-Kassab, J., Ouertani, Z.M., Schiuma, G., Neely, A. (2014). Information visualization to support management decisions. *Int. J. of Information Technology & Decision Making* 13, 407–428.
- Banker, R.D., Chang, H., Pizzini, M. (2011). The judgmental effects of strategy maps in balanced scorecard performance evaluations. *Int. J. of Accounting Information Systems* 12, 259–279.
- Bassioni, H.A., Price, A.D., Hassan, T.M. (2004). Performance measurement in construction. *J. of Management in Engineering* 20, 42–50.
- Berrah, L., Mauris, G., Montmain, J. (2008). Monitoring the improvement of an overall industrial performance based on a Choquet integral aggregation. *Omega* 36, 340–351.
- Bititci, U.S., Ackermann, F., Ates, A., Davies, J., Garengo, P., Gibb, S., MacBryde, J., Mackay, D., Maguire, C., Van Der Meer, R., others. (2011). Managerial processes: business process that sustain performance. *Int. J. of Operations & Production Management* 31, 851–891.
- Bourne, M., Franco-Santos, M., Kennerley, M., & Martinez, V. (2005). Reflections on the role, use and benefits of corporate performance measurement in the UK. *Measuring Business Excellence* 9(3), 36–40.
- Cardinaels, E., van Veen-Dirks, P.M.G. (2010). Financial versus non-financial information: The impact of information organization and presentation in a Balanced Scorecard. *Accounting, Organizations and Society* 35, 565–578.
- Cliville, V., Berrah, L., Mauris, G. (2007). Quantitative expression and aggregation of performance measurements based on the MACBETH multi-criteria method. *Int. J. of Production Economics* 105(1), 171–189.
- Cocca, P., Alberti, M. (2010). A framework to assess performance measurement systems in SMEs. *Int. J. of Productivity and Performance Management* 59(2), 186–200.
- Doumeingts, G., Clave, F., Ducq, Y. (1995). ECOGRAI—a method to design and to implement performance measurement systems for industrial organizations—concepts and application to the maintenance function, in: *Benchmarking—Theory and Practice*. Springer, pp. 350–368.
- Fletcher, C., Williams, R. (2016). *Appraisal: Improving Performance and Developing the Individual*. Routledge.
- Grabisch, M., Labreuche, C., 2008. A decade of application of the Choquet and Sugeno integrals in multi-criteria decision aid. 4OR: *A Quarterly Journal of Operations Research* 6, 1–44.
- Kagioglou, M., Cooper, R., Aouad, G. (2001). Performance management in construction: a conceptual framework. *Construction management and economics* 19, 85–95.
- Kaplan, R. S. and Norton, D., P. (1996). *The Balance Scorecard: Translating Strategy into Action*. Harvard Business School Press.
- Keeney, R.L. (1996). *Value-focused thinking: a path to creative decision-making*. Harvard University Press, Cambridge, MA.
- KPMG. (2001). Achieving Measurable Performance Improvement in a Changing World: The Search for New Insights. KPMG.
- Kueng, P., Wettstein, T., List, B. (2001). *A holistic process performance analysis through a performance data warehouse*. AMCIS 2001 Proceedings 69.
- Li, F. (2017). Performance evaluation and decision support for industrial system management: a benefit-cost-value-risk based methodology. Ph.D. thesis, Arts et Métiers ParisTech, Metz, France.
- Mazza, R. (2009). *Introduction to information visualization*. Springer Science & Business Media.
- Shah, L. (2012). Value-Risk based evaluation of industrial systems. Ph.D. thesis, Arts et Métiers ParisTech, Metz, France.
- Shankar Purbey, Kampan Mukherjee, Chandan Bhar (2007). Performance measurement system for healthcare processes. *Int. J. Productivity & Performance Management* 56, 241–251.
- Tan, H.P., Plowman, D., Hancock, P. (2008). The evolving research on intellectual capital. *J. of Intellectual Capital* 9, 585–608.
- Van Dooren, W., Bouckaert, G., Halligan, J., and others. (2015). *Performance management in the public sector*. Routledge.
- Unit, E. I. (1994). *The new look of corporate performance measurement*. Research Report, London.
- Vernadat, F., Shah, L., Etienne, A., Siadat, A. (2013). VR-PMS: a new approach for performance measurement and management of industrial systems. *Int. J. of Production Research* 51, 7420–7438.
- Wade, D., Recardo, R. J. (2009). *Corporate performance management: how to build a better organization through measurement-driven strategic alignment*. Routledge.