



Science Arts & Métiers (SAM)

is an open access repository that collects the work of Arts et Métiers Institute of Technology researchers and makes it freely available over the web where possible.

This is an author-deposited version published in: <https://sam.ensam.eu>
Handle ID: <http://hdl.handle.net/10985/8924>

To cite this version :

Elena BERGAMINI, Pietro PICERNO, Françoise NATTA, Patricia THOREUX, Valentina CAMOMILLA, Helene PILLET - Estimation of temporal parameters during sprint running using a trunk-mounted inertial measurement unit - Journal of Biomechanics - Vol. 45, p.1123-1126 - 2012

Any correspondence concerning this service should be sent to the repository

Administrator : scienceouverte@ensam.eu



Estimation of temporal parameters during sprint running using a trunk-mounted inertial measurement unit

Elena Bergamini ^{a,b}, Pietro Picerno ^a, H el ene Pillet ^b, Fran oise Natta ^c, Patricia Thoreux ^{b,d},
Valentina Camomilla ^{a,*}

^a *Locomotor Apparatus Bioengineering Laboratory, Department of Human Movement and Sport Sciences, University of Rome "Foro Italico", piazza Lauro de Bosis 15, 00135 Rome, Italy*

^b *Laboratoire de Biom ecanique, Arts et M etiers ParisTech, 151 bd de l'H opital, 75013 Paris, France*

^c *Service Recherche, Institut National du Sport, de l'Expertise et de la Performance, 11 av du Tremblay, 75012 Paris, France*

^d *Service de Chirurgie Orthop edique et Traumatologique, H opital Avicenne-Universit  Paris 13, 125 route de Stalingrad, 93009 Bobigny, France*

A B S T R A C T

The purpose of this study was to identify consistent features in the signals supplied by a single inertial measurement unit (IMU), or thereof derived, for the identification of foot-strike and foot-off instants of time and for the estimation of stance and stride duration during the maintenance phase of sprint running. Maximal sprint runs were performed on tartan tracks by five amateur and six elite athletes, and durations derived from the IMU data were validated using force platforms and a high-speed video camera, respectively, for the two groups. The IMU was positioned on the lower back trunk (L1 level) of each athlete. The magnitudes of the acceleration and angular velocity vectors measured by the IMU, as well as their wavelet-mediated first and second derivatives were computed, and features related to foot-strike and foot-off events sought. No consistent features were found on the acceleration signal or on its first and second derivatives. Conversely, the foot-strike and foot-off events could be identified from features exhibited by the second derivative of the angular velocity magnitude. An average absolute difference of 0.005 s was found between IMU and reference estimates, for both stance and stride duration and for both amateur and elite athletes. The 95% limits of agreement of this difference were less than 0.025 s. The results proved that a single, trunk-mounted IMU is suitable to estimate stance and stride duration during sprint running, providing the opportunity to collect information in the field, without constraining or limiting athletes' and coaches' activities.

Keywords:

Feature identification

Foot contact detection

Inertial sensor

Sports

Stance and stride duration

1. Introduction

Temporal parameters, i.e., flight and stance duration, during sprint running represent basic, yet very useful information for track and field coaches and their correlation with performance has been widely investigated in the literature ( Coh et al., 2006; Hunter et al., 2004a, 2004b). Previously, force platforms (Hunter et al., 2004b, 2005), stereophotogrammetric systems (Ciacci et al., 2010), optical bars ( Coh et al., 2006), or video-analysis (Ito et al., 2006) have been used to measure or estimate these parameters during sprint running. These instruments, however, are either limited in terms of acquisition volume or require long post-processing time.

As an alternative, wearable inertial measurement units (IMUs) allow in-the-field performance monitoring without constraining athletes' movements. Recently, stance duration has been estimated

during sprint running using shank-mounted accelerometers (Purcell et al., 2005). However, more information concerning the overall strategy of the locomotor act could be provided mounting the unit close to the body centre of mass (Cavagna et al., 1971). Trunk-mounted IMUs have been used to estimate temporal parameters only during walking (Kavanagh and Menz, 2008) and distance running (Auvinet et al., 2002; Lee et al., 2010; Wixted et al., 2010), by identifying event-related features in the signals. During walking, for example, the peak forward acceleration of the centre of mass is related to foot-strike (Verkerke et al., 2005) or, during both walking and distance running, a repeatable change in the direction of trunk rotation about its longitudinal axis occurs prior to foot-off (Saunders et al., 2005; Schache et al., 2002).

However, robustness and reliability of any feature-identification approach rely on the accurate and consistent detection of such features within and across subjects. This highly depends on the signal-to-noise ratio, which, in turn, is influenced by the movements of the soft tissues separating the IMU from the skeleton. These movements are both subject-dependent

* Corresponding author. Tel.: +39 06 36733522; fax: +39 06 36733517.
E-mail address: valentina.camomilla@uniroma4.it (V. Camomilla).

Table 1
Gender (F=female, M=male), mass, and height of the six amateur (A) and the five elite (E) athletes involved in the study. Average speed in the tested steps and, for elite sprinters, the personal best time on a 100 m run are also indicated.

	Group A					Group E					
	A1	A2	A3	A4	A5	A6	E1	E2	E3	E4	E5
Gender	F	F	M	M	M	M	F	F	M	M	M
Mass (kg)	56	45	72	60	73	75	56	54	70	73	72
Height (m)	1.71	1.48	1.72	1.83	1.78	1.80	1.70	1.74	1.74	1.80	1.86
Speed (m/s)	5.7	7.0	7.0	7.4	6.4	7.4	9.7	9.7	10.8	9.9	9.8
Personal best (s)	#	#	#	#	#	#	11.51	11.52	10.17	10.63	10.49

(Lafortune et al., 1995) and sensitive to the site and method of the unit attachment (Forner-Cordero et al., 2008). Moreover, they can be assumed to be larger during sprint running due to the explosiveness of the task, thus jeopardising the consistency of the identified features.

The purpose of this study was to identify recognisable and consistent features in the waveform of the signals supplied by a lower trunk mounted IMU for the estimation of the stance and stride duration during the maintenance phase of sprint running. To this aim, maximal sprint runs were performed on tracks by both amateur and elite athletes. Data provided by an IMU were compared with force platform data or high-speed videos.

2. Materials and methods

Two groups of athletes participated in the study during two different experimental sessions, after giving their written informed consent, approved by the University Ethical Committee (Table 1).

The first experimental session involved six amateur athletes (group A). Tests were carried out on an indoor track. The facility was provided with six adjacent force platforms (Z20740AA, Kistler, Switzerland; total surface: 6.6×0.6 m) embedded in the track and covered with tartan. The force signals were acquired at 200 sample/s and low-pass filtered at 70 Hz using a 4th-order Butterworth filter. All athletes sprinted with a forefoot strike technique.

A second session involved elite athletes (group E) of the Italian National Track and Field Team, tested on their outdoor training track. Reference data were collected using a high-speed camera (Casio Exilim EX-F1, Japan; 512×384 pixels, 300 frame/s), positioned 5 m away from the lane.

In both experimental sessions, each athlete was equipped with an IMU (FreeSense, Sensorize, Italy) containing a 3D accelerometer and a 3D gyroscope (± 6 g and ± 500 deg/s of full range, respectively; 200 sample/s) providing linear acceleration and angular velocity components, respectively along and about the axes of a unit-embedded coordinate system. The IMU data were stored in the unit. Care was paid to the fixation of the IMU on the lower back trunk (L1 level) to limit its oscillations relative to the skeleton (Forner-Cordero et al., 2008). The low lumbar area was avoided, since it is more affected by muscular masses wobbling and a memory foam material was used as an interface between the paravertebral muscles and the IMU. An *ad-hoc* elastic belt was used to mount the device without limiting the athletes' movements.

Force platform and IMU samples were synchronised by recording the same impulsive event (a hammer strike on one platform upon which the IMU was positioned). For group E, no interference with the athletes training schedule was permitted and, therefore, no camera-IMU synchronisation could be performed.

The experimental protocol was the same in both sessions and consisted of 20 min warm-up followed by three sprint runs of 60 m starting from the blocks. To avoid fatigue, a 10 min rest period was given between runs. For each athlete, two strides were analysed at 40 m from the start, during the maintenance phase.

Data obtained in the first session were analysed to identify features related to the foot-strike and foot-off instants of time (t_{FS} , t_{FO}) and used to create algorithms for their automatic detection.

The acceleration and the angular velocity vectors were represented in the unit-embedded coordinate system, and their magnitude (a and ω , respectively) was computed. Since increasing the number of time-series could be useful for performing features identification (Hanlon and Anderson, 2009), the first and second time derivatives of a and ω were calculated. To reduce the effect of high-frequency noise on the numerical differentiation procedure, a wavelet-based approach was used to smooth the signal (Luo et al., 2006).

Each dataset of group A was time-matched with the vertical force. Thresholds of 10 N on the rising, and 25 N on the descending force signal were used to determine reference t_{FS} and t_{FO} , respectively (Hunter et al., 2005). Reference stance

($d_{stance} = t_{FO} - t_{FS}$) and cycle duration between subsequent t_{FO} of the same leg, assumed to be equal to the stride duration, d_{stride} , were calculated.

Repeatable quantifiable features, such as maxima, minima, or slopes, were identified in each IMU dataset of group A, in correspondence with t_{FS} and t_{FO} . Algorithms for their automatic detection were developed in Matlab (v7.9 Mathworks), and an estimate of stance (\hat{d}_{stance}) and stride duration (\hat{d}_{stride}) was performed.

The algorithms were tested on group E data using the same type of time-series dataset to estimate \hat{d}_{stance} and \hat{d}_{stride} . t_{FS} and t_{FO} were visually identified on the videos and reference d_{stance} and d_{stride} calculated.

Validation of the estimated parameters was performed, for both groups, by evaluating the absolute difference between IMU estimate (\hat{d}_{stance} and \hat{d}_{stride}) and reference measurements (d_{stance} and d_{stride}): e_{stance} and e_{stride} .

The following statistical analysis was performed using SPSS (version 17.0; alpha level=0.05):

- Repeated-measures ANOVA on \hat{d}_{stance} , \hat{d}_{stride} , d_{stance} , and d_{stride} to verify the effect of factors: group, athlete and trial;
- Descriptive statistics for \hat{d}_{stance} , \hat{d}_{stride} , d_{stance} , and d_{stride} (mean \pm standard deviation (SD)) for independent factors;
- Test of normal distribution of e_{stance} and e_{stride} with the Shapiro-Wilk test ($p > 0.05$);
- Bland-Altman plots of e_{stance} and e_{stride} , corrected for the effect of repeated measurement error (Bland and Altman, 2007), to assess the agreement between measurement systems with multiple observations (Atkinson and Nevill, 1998);
- Inspection of these Bland-Altman plots and correlation exploration (Nevill and Atkinson, 1997) to investigate the absence of heteroscedasticity;
- Repeated-measures ANOVA on e_{stance} and e_{stride} to verify the effect of the factors: group, athlete and trial.
- When trial and athlete had a not significant effect on variables, absolute reliability for repeated measurement was assessed in terms of limits of agreement (LOA) (Bland and Altman, 2007).

3. Results

No consistent feature was detected for group A on a (Fig. 1(A)), its derivatives, or ω (Fig. 1(B)) that could consistently be related to t_{FS} and t_{FO} . These instants of time were instead related to positive peaks (assumed to coincide with foot-off) and negative peaks (corresponding to foot-strike) on the $\dot{\omega}$ waveform (Fig. 1(C)) and were used to estimate \hat{d}_{stance} .

A feature-based estimate of the cycle duration was performed based on a consistent positive peak (ω_{peak}), detectable even by simple visual inspection in ω (Fig. 1(B)). Distance between odd ω_{peak} was used to estimate \hat{d}_{stride} .

Repeated-measures ANOVA showed that all time intervals differed between groups ($p < 0.05$), but not across athletes ($p > 0.05$) and trials ($p > 0.05$) of the same group. Mean values (\pm SD) for d_{stance} across all athletes, trials and strides were 0.125 s (± 0.015) for group A and 0.105 s (± 0.010) for group E. Equivalent means for d_{stride} were 0.495 s (± 0.040) and 0.455 s (± 0.015).

Normality and no heteroscedasticity were found for e_{stance} and e_{stride} (correlation=0.01 and 0.07). Bland-Altman plots indicated the agreement between reference and IMU estimates for both groups, the mean errors being close to the IMU temporal resolution (0.005 s) (Fig. 2). No statistical differences were found between groups, athletes, and trials. 95% LOA were lower than

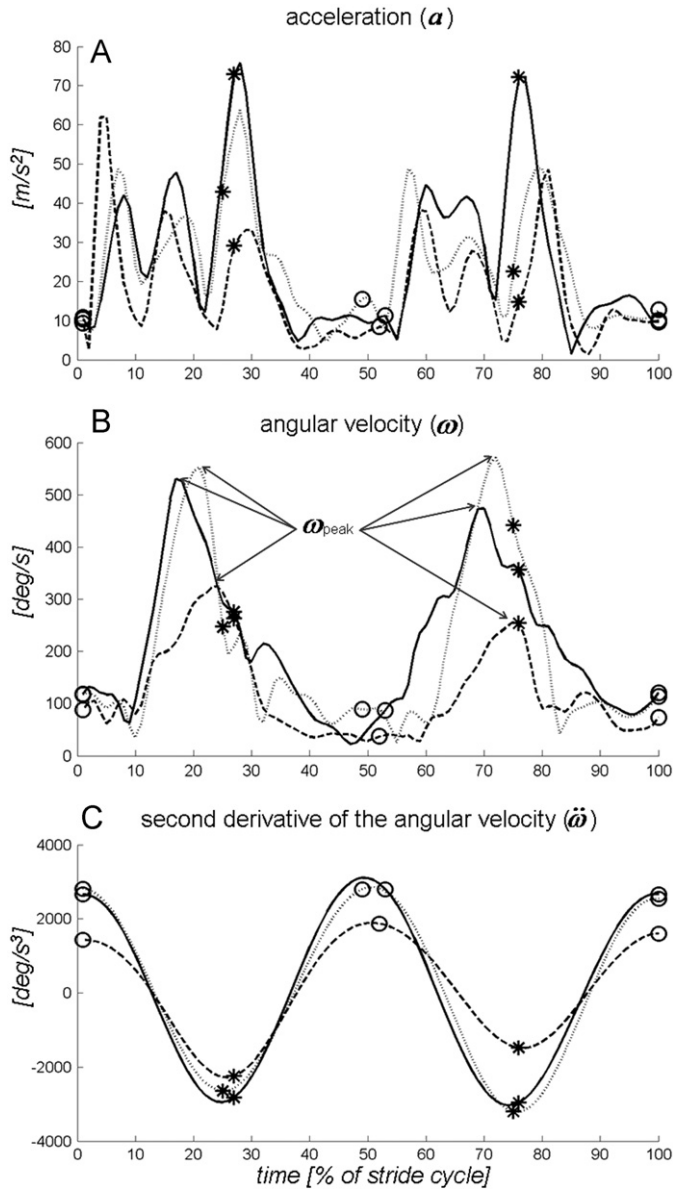


Fig. 1. (A) Acceleration a , (B) angular velocity ω , and (C) second derivative of the angular velocity $\ddot{\omega}$ for three randomly selected athletes of group A, with reference to a randomly chosen stride cycle during the maintenance phase of sprint running defined as the part of the run from when the athlete reaches an upright sprinting position until the end of the run (Jones et al., 2009). Stride cycles were segmented using the force platform signals and expressed in percentage of the total cycle duration. Symbols (○) and (*) indicate reference foot-strike and foot-off instants of time respectively. Arrows in (C) highlight peaks in angular velocity.

0.025 s for both groups. Their symmetry demonstrated the absence of systematic differences of the errors between devices.

4. Discussion

The feature-identification analysis performed on trunk-mounted IMU signals obtained during the maintenance phase of sprint running showed that neither the magnitude of the acceleration, nor its first and second derivatives provide any consistently identifiable feature correlated with t_{FS} and t_{FO} . This result is in contrast with previous studies using trunk-mounted accelerometers during distance running (Auvinet et al., 2002; Lee et al., 2010; Wixted et al., 2010). Speculation on Auvinet et al. and Wixted et al. results is limited by the absence of reference

measurements to support feature detection; while the discrepancy with validated results by Lee et al. can be accounted for by both a different foot position at ground contact and the higher explosiveness of sprint running. In the referenced studies selective gait events related to heel strike could probably be detected as the ankle cannot damp/filter the shock/vibration. During a sprint, the forefoot strike entails considerable damping through the multiarticular anatomy of the foot. Moreover, the movement of the muscular masses at the trunk level is characterised by a larger translational component with respect to the rotational component which, consequently, may be assumed to affect the acceleration more than the angular velocity. It is suggested that results obtained in distance running studies using IMUs not to be automatically extended to sprint running.

The magnitude of the angular velocity signal, as well as its wavelet-mediated second derivative, are characterised by repeatable and consistent events that allow for the estimate of stride and stance duration. The angular velocity peak proved to be consistent across levels of expertise, athletes, and trials. As reported in the literature, this peak is associated to a trunk rotation about its longitudinal axis, which occurs during walking as well as during distance running (Schache et al., 2002; Saunders et al., 2005). Our results evidenced the presence of this rotation during sprint running and its potential use in estimating stride duration, but not t_{FS} and t_{FO} . Such instants were consistently associated only with the positive and negative peaks of the wavelet-mediated $\dot{\omega}$ waveform. It is worth to underline that signal inconsistencies preventing easy feature identification can be present as well in other contexts such as, for example, some types of pathological walking. Given the efficacy of this method

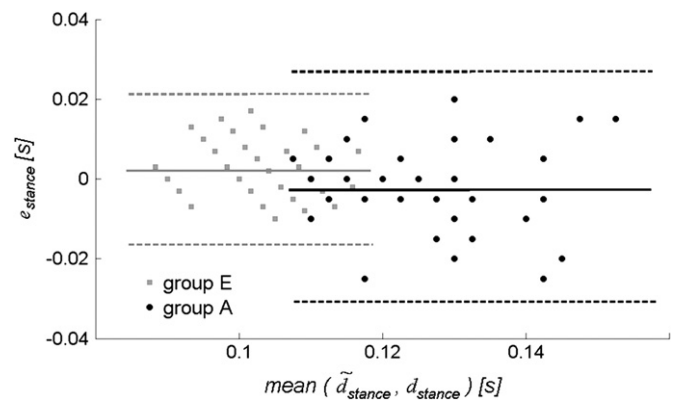


Fig. 2. Bland-Altman plots for group A and group E, representing comparisons between reference stance times and those estimated with IMU. Mean difference (solid lines) and random error lines representing 95% limits of agreement (dashed lines) are included.

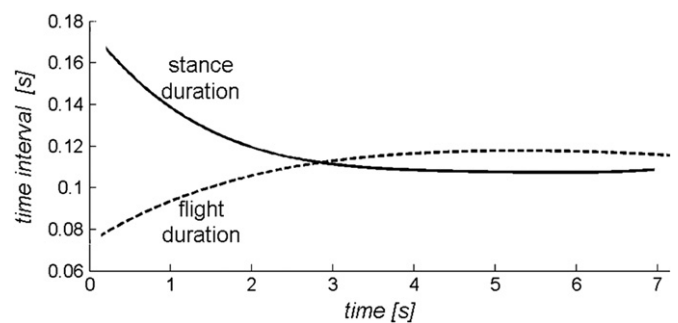


Fig. 3. Stance (solid line) and flight (dashed line) duration time-curves, as obtained from video-analysis, during a 60 m sprint run of a randomly chosen elite sprinter of group E.

on highly noisy data, there is a potential for widening its fields of application.

The absolute difference between IMU and reference measurements was of the same order as the temporal resolution of the criterion measure, as well as of the unit estimates (0.005 s) for both stride ($< 2\%$ of \bar{d}_{stride}) and stance ($< 8\%$ of \bar{d}_{stance}) duration. The latter result is consistent with those obtained during sprint running using shank-mounted accelerometers (Purcell et al., 2005). This error does not prevent discrimination of amateur from elite athletes' temporal parameters (the average difference of d_{stance} between groups is 0.020 s). It may allow the analysis of the race strategy through observation of step frequency (Salo et al., 2011) or of stance times profile (Fig. 3).

In conclusion, the proposed method presents the potential to provide reliable estimates of temporal parameters during in field training sessions. To provide coaches with reliable and automatic information, validation of the method for different phases of the sprint run during the whole race is required.

Conflict of interest statement

The authors do not have any financial or personal relationships with other people or organisations that could inappropriately influence the manuscript.

Acknowledgements

The authors wish to thank all the athletes who participated in the study and the coach Filippo di Mulo for their valuable time, Adrien Michel and Dr. Marco Donati for their practical and technical support in performing the experiments and in processing data, and John McCamley for his contribution to the refinement of the manuscript. This research was supported by a grant of the Università Italo-Francese (Call Vinci) awarded to E. Bergamini. The study sponsor had no involvement in the study design, in the collection, analysis and interpretation of data, and in the writing of the manuscript and decision to submit the manuscript for publication.

References

- Atkinson, G., Nevill, A.M., 1998. Statistical methods for assessing measurement error (reliability) in variables relevant to sports medicine. *Sports Medicine* 26 (4), 217–238.
- Auvinet, B., Gloria, E., Renault, G., Barrey, E., 2002. Runner's stride analysis: comparison of kinematic and kinetic analyses under field conditions. *Science & Sports* 17, 92–94.
- Bland, J.M., Altman, D.G., 2007. Agreement between methods of measurement with multiple observations per individual. *Journal of Biopharmaceutical Statistics* 17 (4), 571–582.
- Cavagna, G.A., Komarek, L., Mazzoleni, S., 1971. The mechanics of sprint running. *Journal of Physiology Online* 217, 709–721.
- Ciacchi, S., Di Michele, R., Merni, F., 2010. Kinematic analysis of the braking and propulsion phases during the support time in sprint running. *Gait & Posture* 31 (2), 209–212.
- Čoh, M., Tomažin, K., Štuhec, S., 2006. The biomechanical model of the sprint start and block acceleration. *Physical Education & Sport* 4, 103–114.
- Forner-Cordero, A., Mateu-Arce, M., Forner-Cordero, I., Alcántara, E., Moreno, J.C., Pons, J.L., 2008. Study of the motion artefacts of skin-mounted inertial sensors under different attachment conditions. *Physiological Measurement* 29 (4), N21–N31.
- Hanlon, M., Anderson, R., 2009. Real-time gait event detection using wearable sensors. *Gait & Posture* 30 (4), 523–527.
- Hunter, J.P., Marshall, R.N., McNair, P.J., 2004b. Interaction of step length and step rate during sprint running. *Medicine & Science in Sports & Exercise* 36 (2), 261–271.
- Hunter, J.P., Marshall, R.N., McNair, P.J., 2005. Relationships between ground reaction force impulse and kinematics of sprint-running acceleration. *Journal of Applied Biomechanics* 21 (1), 31–43.
- Hunter, J.P., Marshall, R.N., McNair, P.J., 2004a. Reliability of biomechanical variables of sprint running. *Medicine & Science in Sports & Exercise* 36 (5), 850–861.
- Ito, A., Ishikawa, M., Isolehto, J., Komi, P.V., 2006. Changes in the step width, step length, and step frequency of the world's top sprinters during a 100 m race. *New Studies in Athletics* 21 (3), 35–39.
- Jones, R., Bezodis, I., Thompson, A., 2009. Coaching sprinting: expert coaches' perception of race phases and technical constructs. *International Journal of Sports Science & Coaching* 4 (3), 385–396.
- Kavanagh, J.J., Menz, H.B., 2008. Accelerometry: a technique for quantifying movement patterns during walking. *Gait & Posture* 28 (1), 1–15.
- Lafortune, M.A., Henning, E., Valiant, G.A., 1995. Tibial shock measured with bone and skin mounted transducers. *Journal of Biomechanics* 28 (8), 989–993.
- Lee, J.B., Mellifont, R.B., Burkett, B.J., 2010. The use of a single inertial sensor to identify stride, step, and stance durations of running gait. *Journal of Science and Medicine in Sport* 13 (2), 270–273.
- Luo, J., Bai, J., Shao, J., 2006. Application of the wavelet transforms on axial strain calculation in ultrasound elastography. *Progress in Natural Science* 16 (9), 942–947.
- Nevill, A.M., Atkinson, G., 1997. Assessing agreement between measurements recorded on a ratio scale in sports medicine and sports science. *British Journal of Sports Medicine* 31 (4), 314–318.
- Purcell B., Channels J., James D., Barrett R. Use of accelerometers for detecting foot-ground contact time during running. *Proceedings of SPIE* 2005; 6036(603615): 1–8.
- Salo, A.L., Bezodis, I.N., Batterham, A.M., Kerwin, D.G., 2011. Elite sprinting: are athletes individually step-frequency or step-length reliant? *Medicine & Science in Sports & Exercise* 43 (6), 1055–1062.
- Saunders, S.W., Schache, A., Rath, D., Hodges, P.W., 2005. Changes in three dimensional lumbo-pelvic kinematics and trunk muscle activity with speed and mode of locomotion. *Clinical Biomechanics (Bristol, Avon)* 20 (8), 784–793.
- Schache, A.G., Blanch, P., Rath, D., Wrigley, T., Bennell, K., 2002. Three-dimensional angular kinematics of the lumbar spine and pelvis during running. *Human Movement Science* 21 (2), 273–293.
- Verkerke, G.J., Hof, A.L., Zijlstra, W., Ament, W., Rakhorst, G., 2005. Determining the centre of pressure during walking and running using an instrumented treadmill. *Journal of Biomechanics* 38 (9), 1881–1885.
- Wixted, A.J., Billing, D.C., James, D.A., 2010. Validation of trunk mounted inertial sensors for analysing running biomechanics under field conditions, using synchronously collected foot contact data. *Sports Engineering* 12, 207–212.