



### Science Arts & Métiers (SAM)

is an open access repository that collects the work of Arts et Métiers Institute of Technology researchers and makes it freely available over the web where possible.

This is an author-deposited version published in: <https://sam.ensam.eu>  
Handle ID: <http://hdl.handle.net/10985/22742>



This document is available under CC BY-NC license

#### To cite this version :

Théo ROUVIER, C. LIVET, Antoine LOMBART, Georges DUMONT, C. PONTONNIER, Christophe SAURET, Helene PILLET - Comparison of scapula soft tissue artefact compensation methods during manual wheelchair locomotion - Gait & Posture - Vol. 97, p.S233-S234 - 2022

Any correspondence concerning this service should be sent to the repository

Administrator : [scienceouverte@ensam.eu](mailto:scienceouverte@ensam.eu)



# Comparison of scapula soft tissue artefact compensation methods during manual wheelchair locomotion

T. Rouvier<sup>a,\*</sup>, C. Livet<sup>b</sup>, A. Lombart<sup>a</sup>, G. Dumont<sup>b</sup>, C. Pontonnier<sup>b</sup>, C. Sauret<sup>a,c</sup>, H. Pillet<sup>a</sup>

<sup>a</sup> Arts et Métiers Institute of Technology- Université Sorbonne Paris Nord- HESAM Université, IBHGC - Institut de Biomécanique Humaine Georges Charpak, Paris, France

<sup>b</sup> Univ Rennes, Inria- CNRS- IRISA - UMR 6074, Rennes, France

<sup>c</sup> Institution Nationale des Invalides, CERAH - Centre d'Études et de Recherche sur l'Appareillage des Handicapés, Créteil, France

## 1. Introduction

Two third of manual wheelchair (MWC) users report suffering or having suffered from shoulder pain or injury [1]. To favour the understanding of these disorders, it is crucial to quantify the shoulder kinematics and kinetics during MWC locomotion [2]. However, soft tissue artefacts (STA) are particularly present at the scapula, making it difficult to accurately track the bone motion [3], motivating researchers to propose compensation methods based on acromion or scapula spine marker clusters and a calibration pose [4]. Apart from invasive or irradiative methods, the reference method to localize the scapula bone is based on external palpation generally through the use of a scapula palpator (SP) [5]. In this study, we propose to compare the scapula kinematics reconstructed from a cluster with STA compensation based on one or two calibration static poses during the push phase with the reference method using a SP.

## 2. Research question

Which calibration method best compensates STA at the scapula when analysing locomotion in MWC from motion capture data?

## 3. Methods

The two calibration methods proposed in this study are:

- Rigid: rigid transformation of the cluster reference frame to the SP reference frame in one pose corresponding to the middle of the propulsion phase
- Linear: Linear transformation of the cluster frame to the SP frame between the start and end of propulsion. Transformation is computed using spherical linear interpolation [6] with regards to the position of the cluster frame.

During the experiments, 5 MWC users equipped with spinal cluster were seated in a static ergometer and were asked to reproduce MWC locomotion in slow motion. An experimenter followed the movement of the right scapula with a SP. Subjects performed between 2 to 6 trials of 5 propulsion cycles (10–30 cycles per subject). Calibration poses were extracted from each cycle and served to reconstruct SP markers from cluster. The comparison between calibration methods was done through the marker reconstruction root mean square error (RMSE) between measured and reconstructed SP [7].

---

\* Corresponding author.

## 4. Results

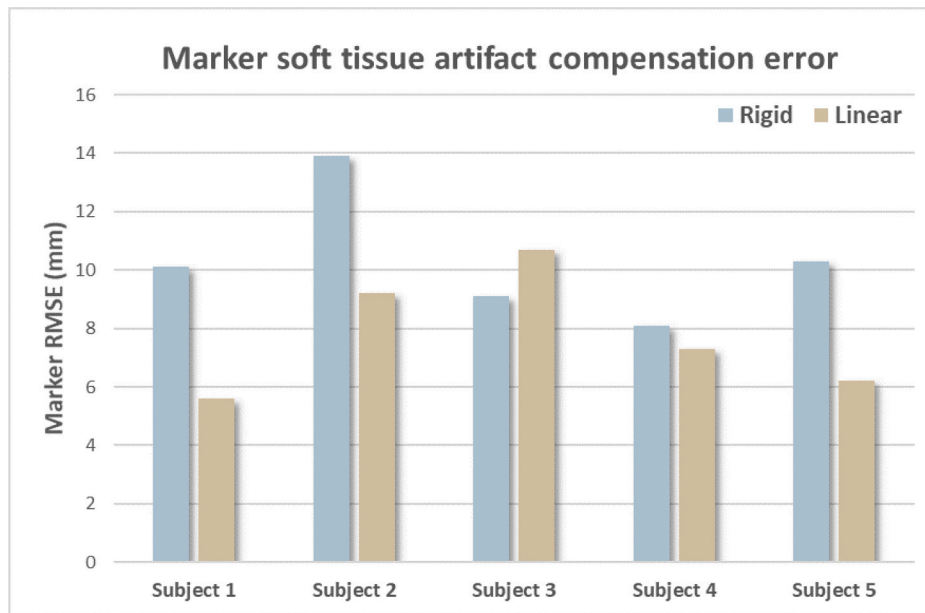


Fig. RMSE between experimental and reconstructed scapula landmarks for each subject.

Results show a reduction of the RMSE for 4 subjects using the 2 poses calibration method compared to the single pose method. Using this method, the RMSE ranged between 0.56 cm and 1.07 cm for the whole cohort.

## 5. Discussion

This study shows encouraging results with the two poses calibration method with RMSE that were lower than the error of the reference itself, as reported by De Groot et al. (i.e. 1.1 cm with a SP) [8]. If it can be hypothesized that more calibration poses would improve further the scapula reconstructed kinematics, the two poses could provide an acceptable trade-off between result accuracy and time dedicated to model calibration.

## References

[1] Kathleen A. Curtis, George A. Drysdale, R. David Lanza, Morey Kolber, Richard S. Vitolo, Ronald West, Shoulder pain in wheelchair users with tetraplegia and paraplegia, *Arch. Phys. Med. Rehabil.* 80 (4) (1999) 453–457. ISSN 0003-9993.

[2] Samuel Hybois, Pierre Puchaud, Maxime Bourgain, Antoine Lombart, Joseph Bascou, François Lavaste, Pascale Fodé, Hélène Pillet, Christophe Sauret, Comparison of shoulder kinematic chain models and their influence on kinematics and kinetics in the study of manual wheelchair propulsion, *Med. Eng. Phys.* 69 (2019) 153–160. ISSN 1350-4533.

[3] Miroslav Senk, Laurence Chèze, A new method for motion capture of the scapula using an optoelectronic tracking device: a feasibility study, *Comput. Methods Biomech. Biomed. Eng.* 13 (3) (2010) 397–401.

[4] Mathieu Lempereur, Sylvain Brochard, Fabien Leboeuf, Olivier Rémy-Néris, Validity and reliability of 3D marker based scapular motion analysis: a systematic review, *J. Biomech.* 47 (10) (2014) 2219–2230. ISSN 0021-9290.

[5] Benjamin Michaud, Sonia Duprey, Mickaël Begon, Scapular kinematic reconstruction – segmental optimization, multibody optimization with open-loop or closed-loop chains: which one should be preferred? *International Biomechanics* 4 (2) (2017) 86–94, <https://doi.org/10.1080/23335432.2017.1405741>.

[6] Mehdi Jafari, Habib Molaei, Spherical linear interpolation and Bézier curves, *Gen. Sci. Res.* 2 (1) (2014) 13–17. December, 2014.

[7] Vincent Fohanno, Mickaël Begon, Patrick Lacouture, Floren Colloud, Improvement of upper extremity kinematics estimation using a subject-specific forearm model implemented in a kinematic chain, *J. Biomech.* 46 (6) (2013) 1053–1059.

[8] H de Groot Jurriaan, The variability of shoulder motions recorded by means of palpation, *Clin. Biomech.* 12 (1998) 461–472.